

AC-DC Converter


**POWER
SOLVE**

PAE3000 Series 3000W Active PFC Single Output

www.powersolve.co.uk

Features

- Universal AC Input / Full Range
- Programmable Output Voltage (0%-105%)
- Programmable Output Current (0%-105%)
- Constant Current Limit
- +5V/0.5A or +9V/0.3A Auxiliary Output
- Forced current sharing for parallel operation
- Power OK signal
- Remote ON/OFF, Remote Sense function
- OVP, OLP, OTP, SCP, Fan Failure Protections
- Global Control via RS232
- Remote Setting multiple PSU via RS232, RS485 & I²C

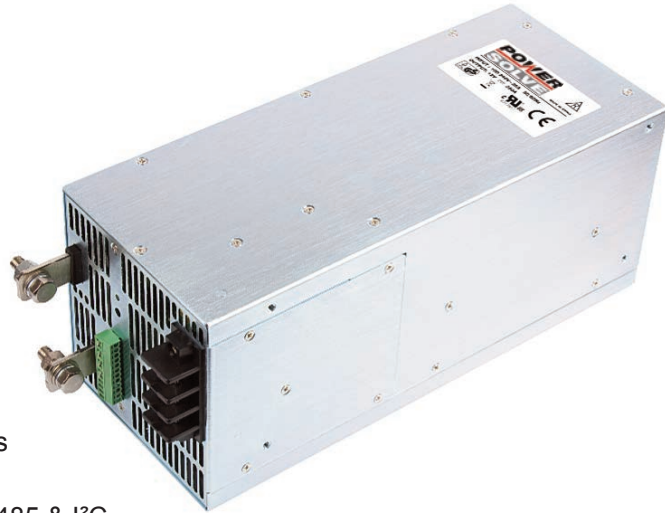

Electrical Specification

Input Voltage	90-264VAC, 47-63Hz / 127-370VDC. Below 100VAC, derate load linearly to 80% at 90VAC.
Power Factor	0.95 at 230VAC / 0.98 at 115VAC at full load
AC Input Current (typ.)	36A at 115VAC / 18A at 230VAC
Inrush Current	60A at 115VAC / 90A at 230VAC
Leakage Current	<2.5mA at 240VAC
Output Voltage	See Table
Output Current	See Table
Voltage Tolerance	±2%
Voltage Adjust Range	±5.0% typical adjustment by potentiometer
Overload Protection	>105% of rated output power. Protection type: Constant current limiting
Overvoltage Protection	Variable OVP, 120% ±7% of V _{out} . Output latches off, recycle AC input to recover or inhibit
Over Temperature Protection	Shuts down output, recovers automatically (85°C ±5°C detected on heatsink on primary & secondary side)
Auxiliary Power	+5V/0.5A or +9V/0.3A auxiliary output selected by user
Remote ON/OFF Control	External switch or NPN transistor to turn on/off
Power OK Signal	Open drain signal low when PSU turns on. Max. sink current 20mA, max drain voltage 40V
Output Voltage Programming	Adjustment of output voltage between 0-105% of rated output
Output Current Programming	Adjustment of output current between 0-105% of rated output
Global Control	Via RS232/RS485 or I2C Address switch setting supported (7+1)
Operating Temperature Range	-25°C to +60°C. Above 50°C, derate linearly to 60% load at 60°C
Operating Humidity	20-90% RH non-condensing
Storage Temperature Range	-40°C to +85°C
Storage Humidity	10-95% RH non-condensing
Temperature Coefficient	±0.02%/°C (0-50°C)
Vibration	10-500Hz, 2G 10 min./1 cycle, period 60min. each along X, Y & Z axes. Compliance to IEC68-2-6, IEC68-2-64
Safety Standards	Certified to UL60950-1, EN60950-1
Withstand Voltage	I/P-O/P: 3KVAC (4242VDC), I/P-FG: 1.5KVAC (2121VDC), O/P-FG: 0.5KVAC (707VDC)
Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100MΩ / 500VDC
EMI Conduction & Radiation	Certified to EN55022, EN61204-3, EN61000-6-3
Harmonic Current	Certified to EN61000-3-2, EN61000-3-3
EMS Immunity	Certified to EN55024, EN61204-3, EN61000-6-1, EN61000-4-2, -3, -4, -5, -6, -8, -11
Cooling	Internal fan controlled by power rating & temperature, allow 50mm clearance at each end for airflow
Dimensions	366(L) x 127(W) x 127(H) mm
Weight	2.6Kg

Notes:

1. All parameters NOT specifically mentioned are measured at 230Vac input, rated load and 25°C ambient temperature
2. Ripple and noise are measured at 20MHz bandwidth by using a 12" twisted pair wire terminated with a 0.1µF ceramic & 47µF electrolytic capacitors across the output
3. Tolerance includes set up tolerance, line regulation and load regulation
4. Derating is required at low input voltages. Below 100Vac, derate linearly to 80% load at 90Vac
5. When parallel connected, only one unit may operate if the total output load is less than 5% of rated load
6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC Directives

AC-DC Converter




www.powersolve.co.uk

Output Voltage and Current Ratings

MODEL	OUTPUT VOLTAGE	MAX OUTPUT CURRENT	RIPPLE & NOISE	LINE REG.	LOAD REG.	POWER Max.	EFF.
PAE3000-12	12V	250A	150mV p-p	±1%	±1%	3000W	89%
PAE3000-15	15V	200A	150mV p-p	±1%	±1%	3000W	90%
PAE3000-24	24V	125A	240mV p-p	±1%	±1%	3000W	91%
PAE3000-30	30V	100A	300mV p-p	±1%	±1%	3000W	91%
PAE3000-36	36V	83.5A	360mV p-p	±1%	±1%	3006W	92%
PAE3000-48	48V	62.5A	480mV p-p	±1%	±1%	3000W	92%
PAE3000-60	60V	50A	600mV p-p	±1%	±1%	3000W	93%

Mechanical & Connection Details

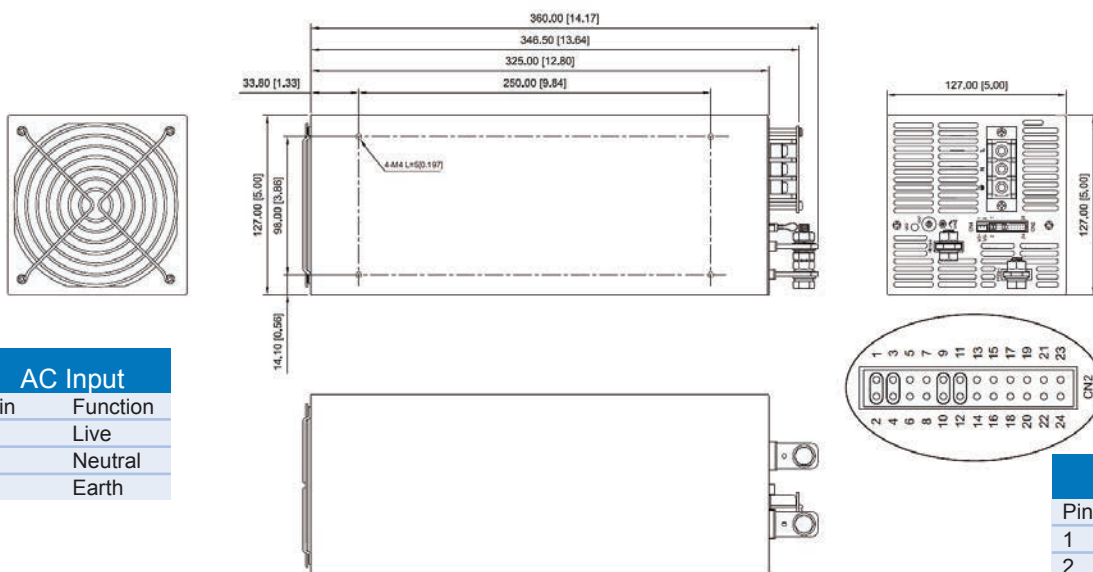

Function Description of CN2, Control Connector

Pin No.	Function	Description	Mating Housing	Terminal
1	VS+	Remote Sense (+)	JST PHDR-24VS	JST SPHD-002T-P0.5
2	VO+	Positive Output Voltage		
3	VS-	Remote Sense (-)		
4	VO-	Negative Output Voltage		
5	POK	Power OK		
6, 10, 14, 16, 18, 22	GND	Ground		
7	PAR	Parallel operation current share		
8	VSET	Auxiliary output setting		
9	EN-	Inhibit (-)		
11	EN+	Inhibit (+)		
12, 17, 21	AUX	+5V / 0.5A or +9V / 0.3A Auxiliary power		
13	ACI	I Program		
15	VCI	V Program		
19	SCL	Serial clock used in the I2C interface		
20	SDA	Serial data used in the I2C interface		
23	N.C.	For RS232 Receiver function		
24	N.C.	For RS232 Transmission function		

LED Status



LED Colour	LED Signal	Status
Green LED	Solid	Power OK (Local mode)
Orange LED	Solid	Power OK (Remote mode)
Green LED	Slow Blink	Power Standby
	Fast Blink	Over Voltage Protection (OVP)
	Solid	Over Load Protection (OLP)
Red LED	Slow Blink	Over Temperature Protection (OTP)
	Intermittent Blink	Fan Failure
	Interlace Blink	Power Failure

AC-DC Converter




www.powersolve.co.uk

De-rating Curve





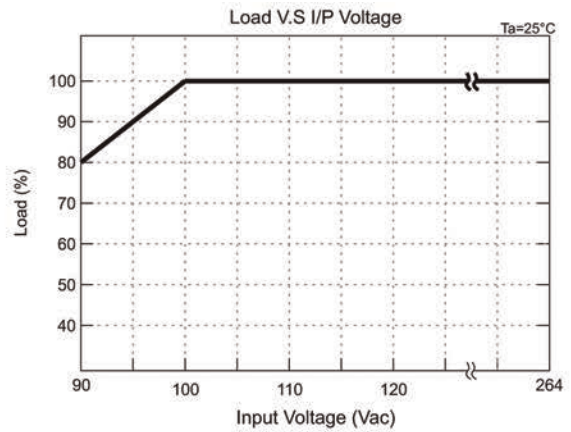
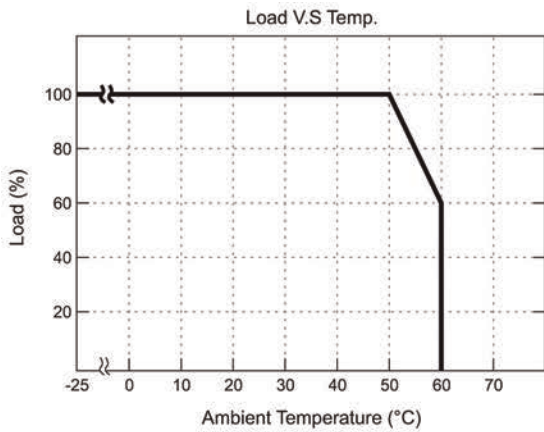


Programming Input

■ CMD VS Output Curve:

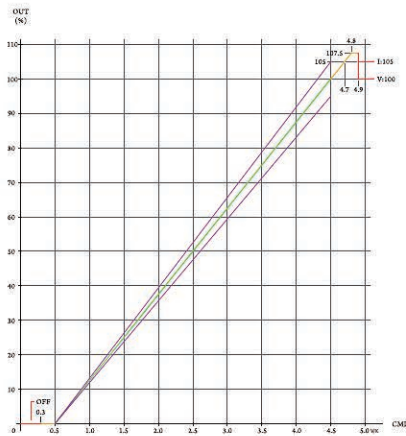

■ VCI VS OVP Curve:

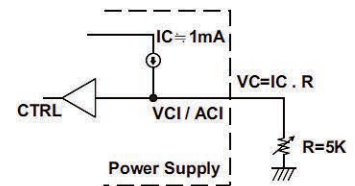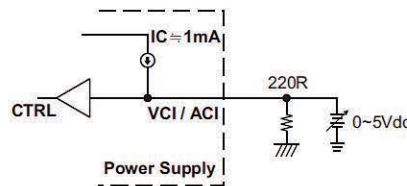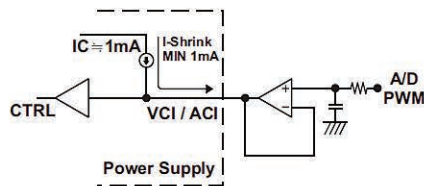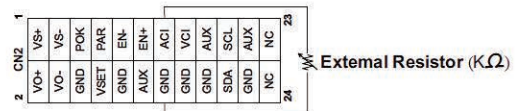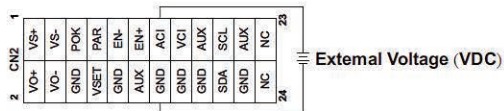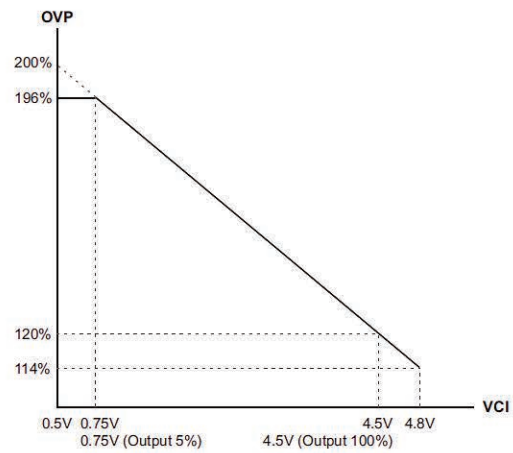


AC-DC Converter



www.powersolve.co.uk


Remote ON/OFF

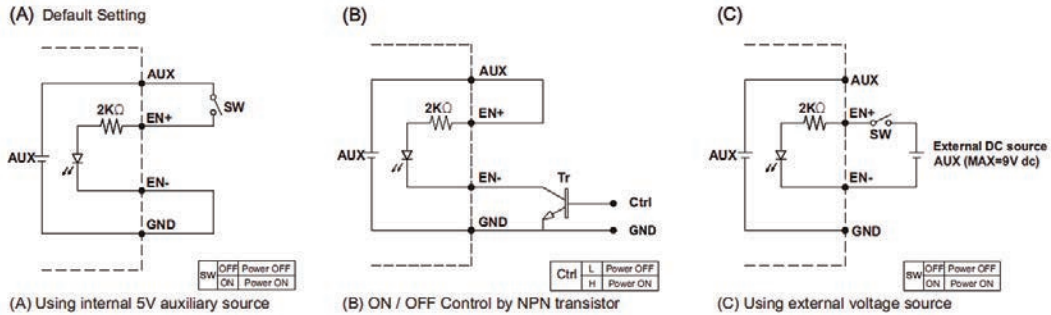


GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power(NEG-).

Power OK Signal

Open drain signal low when PSU turns on. Max. P.OK sink current: 20mA, Max. drain voltage: 40V.

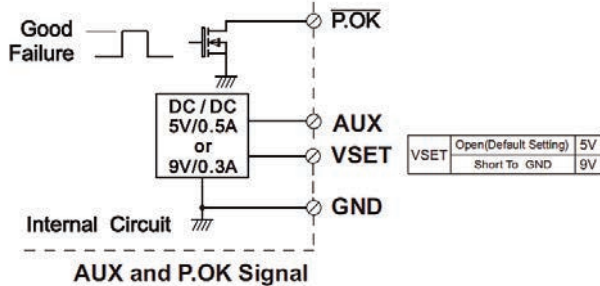

*Place an additional capacitor to have a better performance of auxiliary power operation.



Do NOT exceed 5V/0.5A or 9V/0.3A


*The grounding of "AUX" power and P.OK signal should be connected to "GND" part. If "VO-" is connected as Grounding, make sure to short the GND and VO- ports.

GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power(NEG-).


Functions

GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power(NEG-).

1. Remote Sense

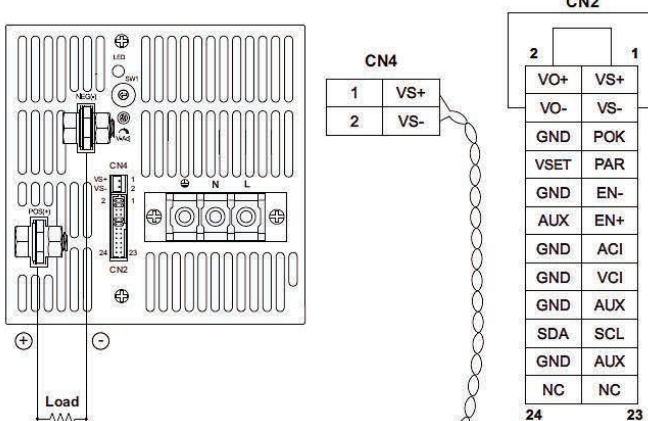

2. Local Sense (Default setting)

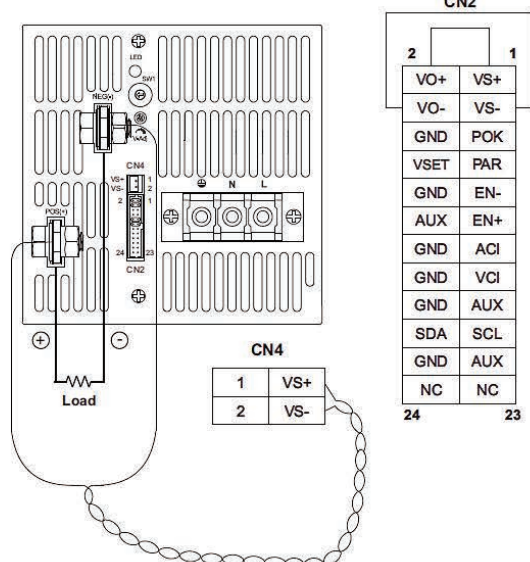


VS-,VS+ Compensation Voltage < 0.5V

AC-DC Converter




www.powersolve.co.uk

3. Current Sharing with Remote Sensing (Parallel Connection)

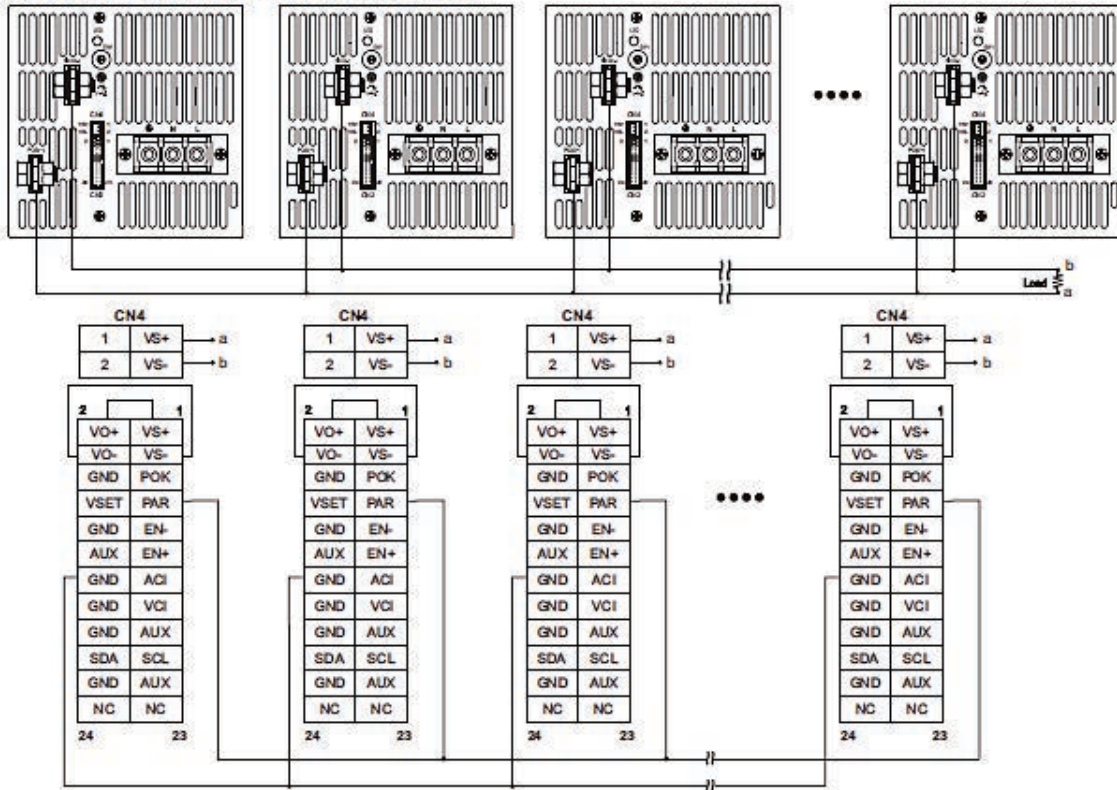

4. Current Sharing with Local Sensing

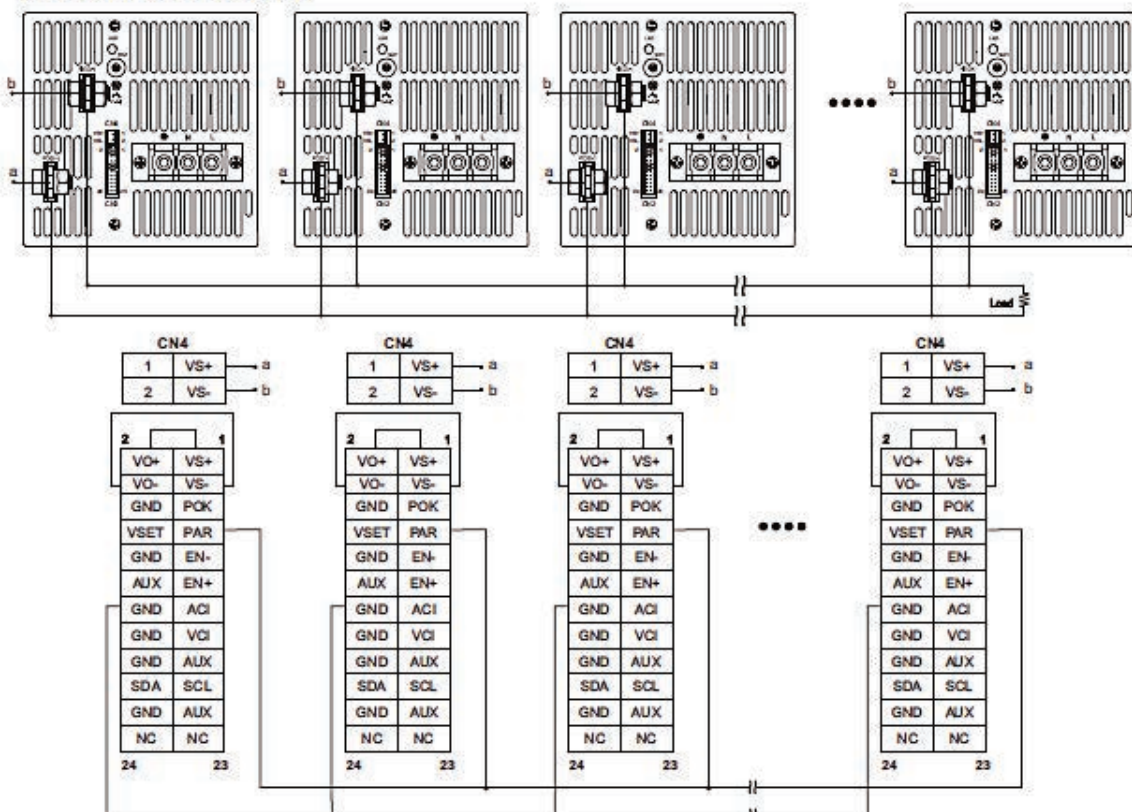

AC-DC Converter

**POWER
SOLVE**


www.powersolve.co.uk

Installation Instructions

1. Mounting Directions

1-1 Recommended standard mounting methods ;

(a)

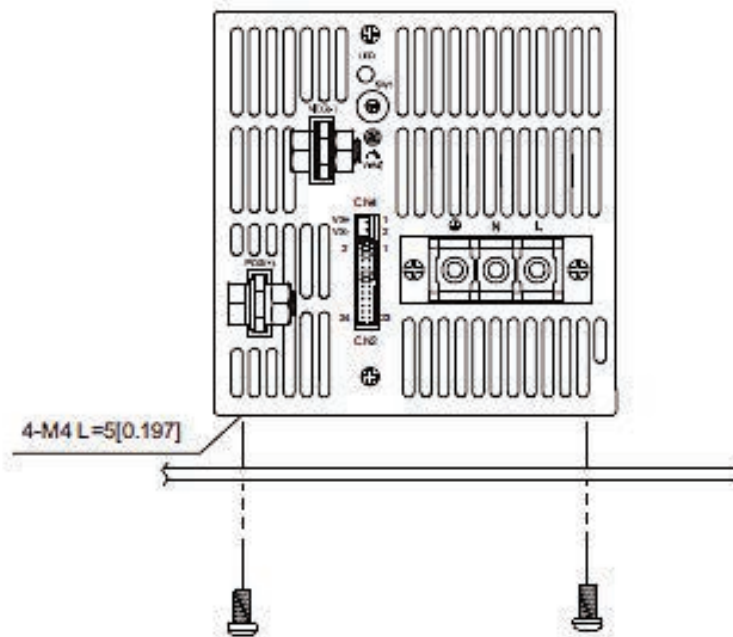

2. Mounting Method

2-1 There are ventilating holes on the front and back side panels, do not obstruct; allow 50mm at least for air flow.

2-2 Recommended the torque of mounting screw:
M4 screw: 1.27N · m (13.0kgf · cm)

