

1W


The CA-T Series are precision regulated high voltage power supplies that are designed to perform over a wide operating temperature range of -55°C to +70°C without derating. They are fully programmable (0 to 100%) via a DAC compatible high impedance programming input and include a voltage monitor output for easy system integration. The on-board precision reference output can be used to drive the programming input to further simplify the solution.

A quasi-sinewave oscillator design with additional output filtering results in very low ripple and noise and excellent stability. All models include protection against arcs and short circuits. The internal transformer shielding and isolated case reduce EMI/RFI radiation to extremely low levels making these ideal for sensitive equipment containing photomultiplier tubes or avalanche photodiodes.

Features

- Operating Temperature -55°C to +70°C
- Precision Voltage Regulated
- Output Voltages from 100V to 2000V
- 5V and 12V Input Models
- 0 to 100% Programmable Output
- On-board Voltage Reference
- Temperature Coefficient <25ppm/°C
- Shielded Case with Isolated Case Ground
- Ultra Low Ripple, down to 5ppm
- 3 Year Warranty

Block Diagram

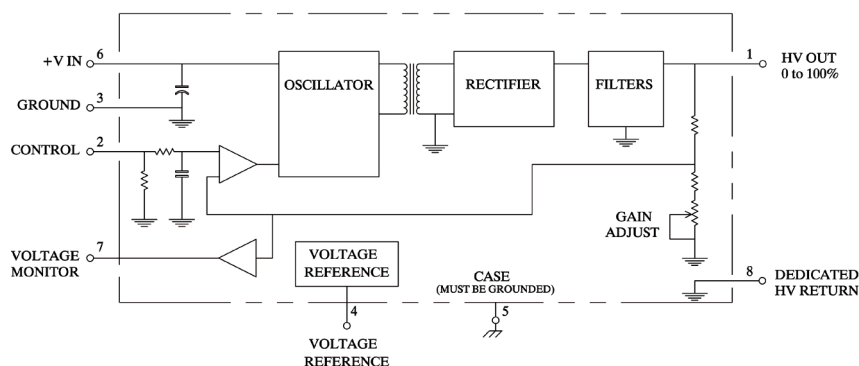

DC-HVDC CONVERTER



Typical Applications



- Photo Multiplier Tube
- Solid State Detectors
- Avalanche Photodiodes
- Electrophoresis
- Piezo Devices
- Capacitor Charging
- EO Lenses

Dimensions

1.8 x 1.12 x 0.51" (45.7 x 28.5 x 12.9mm)

Input

12Vin Models					
Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage, Vin	11.5	12.0	15.5	VDC	For 12Vin models
Input Current, No Load			80	mA	200V-1250V
Input Current, No Load			100	mA	2kV
Input Current, Full Load			220	mA	All Output Voltages
Programming Voltage, Vpgm	0		5	VDC	<150μA
5Vin Models					
Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage, Vin	4.75	5	5.25	VDC	For 5Vin models
Input Current, No Load			65	mA	200V-1250V
Input Current, No Load			155	mA	2kV
Input Current, Full Load			420	mA	200V-1250V
Input Current, Full Load			550	mA	2kV
Programming Voltage, Vpgm	0		2.048	VDC	<150μA

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage			2000	VDC	See Models & Ratings table
Output Current			5	mA	See Models & Ratings table
Output Programming	0		100	%	
Setpoint Accuracy ⁽⁴⁾		±1		%	
Gain Adjust ⁽⁵⁾		±1		%	Potentiometer
Linearity ⁽⁶⁾			±0.5	%	15 to 100% Output
Minimum Load	No minimum load required				
Line Regulation	0.001		0.01	%	Conditions: 100% Vpgm, Full Load
Load Regulation	0.001		0.05	%	No Load to Full Load at 100% Vpgm, Nominal Vin.
Short Circuit Protection ⁽⁷⁾	1			MIN	
Ripple and Noise	0.0005		0.01	%	1MHz bandwidth, see Models & Ratings table
Temperature Coefficient		25		ppm/°C	
Stability			50	ppm/hr	
Voltage Monitor Output	0		Max Vpgm	VDC	Range corresponds to 0 to 100% Vout
Voltage Reference Output		Max Vpgm			Vref is a fixed output equal to Max Vpgm

Notes:

- Maximum rated output current is available from 100% Max Vout down to 50% Max Vout, then derates linearly from 50% Max Vout down to zero.
- Specifications after 1 hour warm-up, full load, 25°C unless otherwise indicated.
- Proper thermal management techniques are required to maintain safe case temperature.
- SET POINT ACCURACY refers to the ability of the unit to accurately deliver the programmed voltage.
- GAIN ADJUST refers to the ability to alter the gain of the circuit to allow for set-point accuracy error.
- LINEARITY refers to how much the transfer function can deviate from a straight line in the absence of any set-point error.
- Need to be limited to rated full load input current.

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Isolation	N/A - Input Ground is connected to Output Ground				
Switching Frequency	80		400	kHz	
Construction	Case materials is aluminum. UL 94 V-0 rated solid vacuum encapsulation				
Mean Time Between Failure	2.1			Mhrs	Per Bellcore TR 332 GB +25°C

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-55		+70	°C	Case temperature
Storage Temperature	-55		+95	°C	
Cooling	Natural convection				
Humidity			95	%RH	Non-condensing
Thermal Shock Limit			1	°C/10sec	Natural convection

Safety Approvals

Safety Agency	Standard	Notes & Conditions
RoHS	RoHS 2 and 3 Directive (2011/65/EU)	Where applicable


Models & Ratings

Model Number	Output Voltage	Output Current ⁽¹⁾	Regulation		Ripple	Frequency	Input Voltage
			Load	Line			
CA02N-T	0 to -200V	5mA	<0.05%	<0.01%	<0.01%	80-230kHz	12V
CA02P-5TR	0 to +200V	5mA	<0.01%	<0.01%	<0.01%	100-250kHz	5V
CA02P-T	0 to +200V	5mA	<0.05%	<0.01%	<0.01%	80-180kHz	12V
CA05N-T	0 to -500V	2mA	<0.01%	<0.01%	<0.01%	100-250kHz	12V
CA05P-5T	0 to +500V	2mA	<0.003%	<0.002%	<0.005%	100-250kHz	5V
CA05P-T	0 to +500V	2mA	<0.01%	<0.01%	<0.01%	200-400kHz	12V
CA10N-5T	0 to -1000V	1mA	<0.005%	<0.001%	<0.001%	100-250kHz	5V
CA10N-T	0 to -1000V	1mA	<0.005%	<0.001%	<0.001%	100-250kHz	12V
CA12N-5TR	0 to -1250V	0.8mA	<0.005%	<0.001%	<0.001%	150-300kHz	5V
CA12N-T	0 to -1250V	0.8mA	<0.005%	<0.001%	<0.0005%	80-250kHz	12V
CA12P-5T	0 to +1250V	0.8mA	<0.005%	<0.001%	<0.001%	150-300kHz	5V
CA12P-T	0 to +1250V	0.8mA	<0.005%	<0.001%	<0.0005%	80-250kHz	12V
CA20N-5T	0 to -2000V	0.5mA	<0.001%	<0.001%	<0.001%	100-250kHz	5V
CA20N-T	0 to -2000V	0.5mA	<0.01%	<0.01%	<0.001%	100-250kHz	12V
CA20P-T	0 to +2000V	0.5mA	<0.01%	<0.01%	<0.001%	80-250kHz	12V


R suffix is used as a RoHS designator for legacy part numbers.

Mechanical Details

Top View

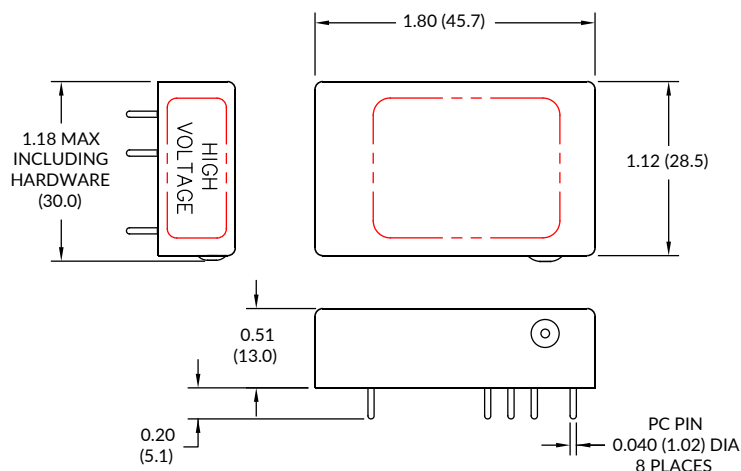

PCB Layout

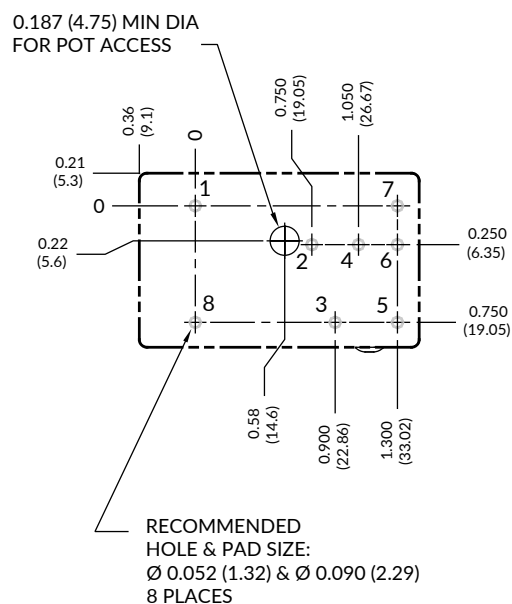

Pin	Function	Description	5V _{in}	12V _{in}
1	VOUT	High Voltage Output		
2	VPGM	Voltage Programming Input, <150µA	0 to +2.048V	0 to +5V
3	SGND	Signal Ground [For VPGM, VIN, VMON]		
4	VREF	Voltage Reference Output, +/- 1% , 1 mA	+2.048V	+5V
5	CGND	Case Ground		
6	VIN	Input Voltage	+4.75 to +5.25V	+11.5V to +15.5V
7	VMON	Voltage Monitor Output, 1mA, scales to 0 to 100% Vout	0 to +2.048V	0 to +5V
8	HV RTN	HV Output Return		

Notes:


1. All dimensions are in inches (mm)
2. Weight: 1.4oz (39.6g)
3. Tolerance: X.XX±0.02 (0.51)
4. Pin Tolerance: ±0.005 (0.127)
5. All grounds internally connected except case. Case Ground (Pin5) must be

- connected to ground, with no more than 50V between case ground (Pin 5) and circuit ground (Pin 3).
6. On negative output models, voltage monitor is buffered representation of programming voltage.

CA-T Series

Mounting Kit

CM1: MHV Connector

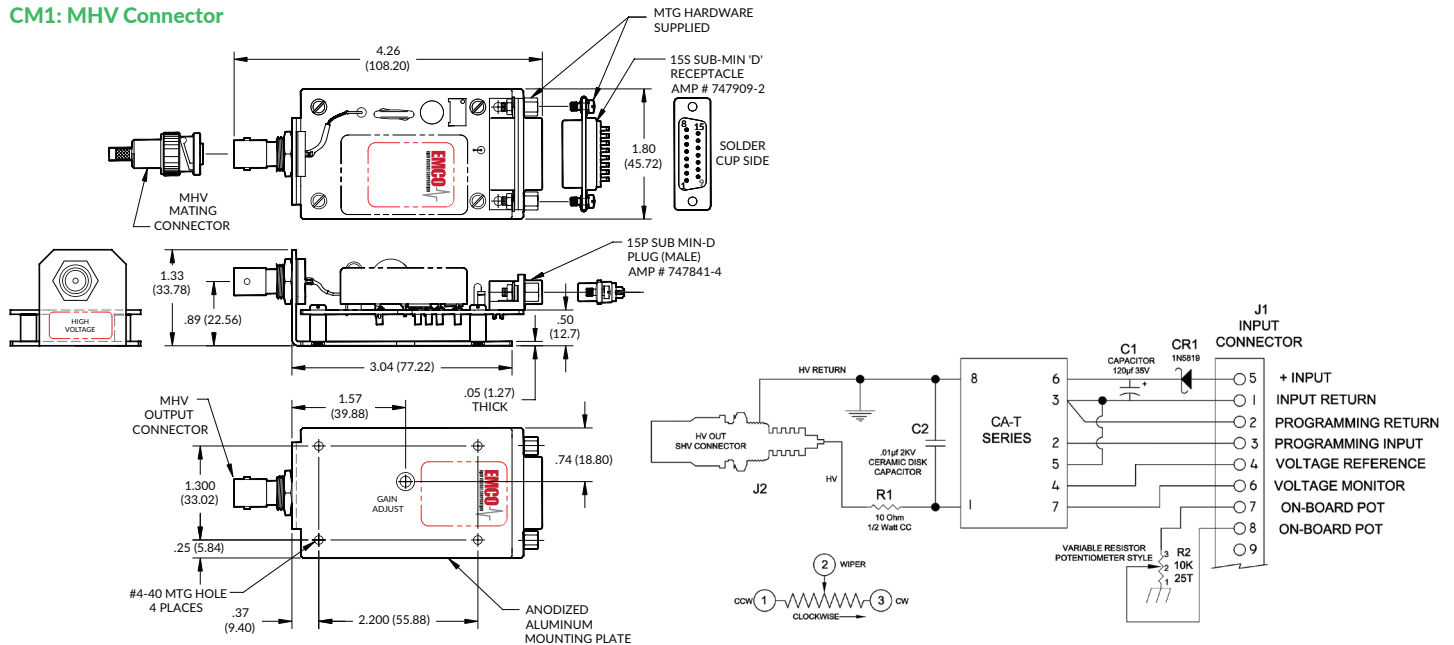

Product Description

These adapters provide convenient prototyping and evaluation during system development and integration. They allow the high voltage modules to be mounted to a chassis instead of designed into a PC board. Extra filtering on the input and output improves performance. A schottky diode on the input provides reverse polarity protection. Input connector is via a 15P SUB MIN-D plug (mate supplied) and output is via an MHV style coaxial connector (mate supplied). Please note when ordering, the high voltage module is not included and must be ordered separately.


Programming Instructions

Onboard Potentiometer: connect pins 7 to 4 and 8 to 3, turn potentiometer to adjust high voltage. Or Remote Potentiometer: connect wiper arm to pin 3, other sides to pins 4 and 2. Or Remote Analog Signal: apply programming voltage to pin 3, return to pin 2.

CA-T Series

Mounting Kit

CM2: SHV Connector

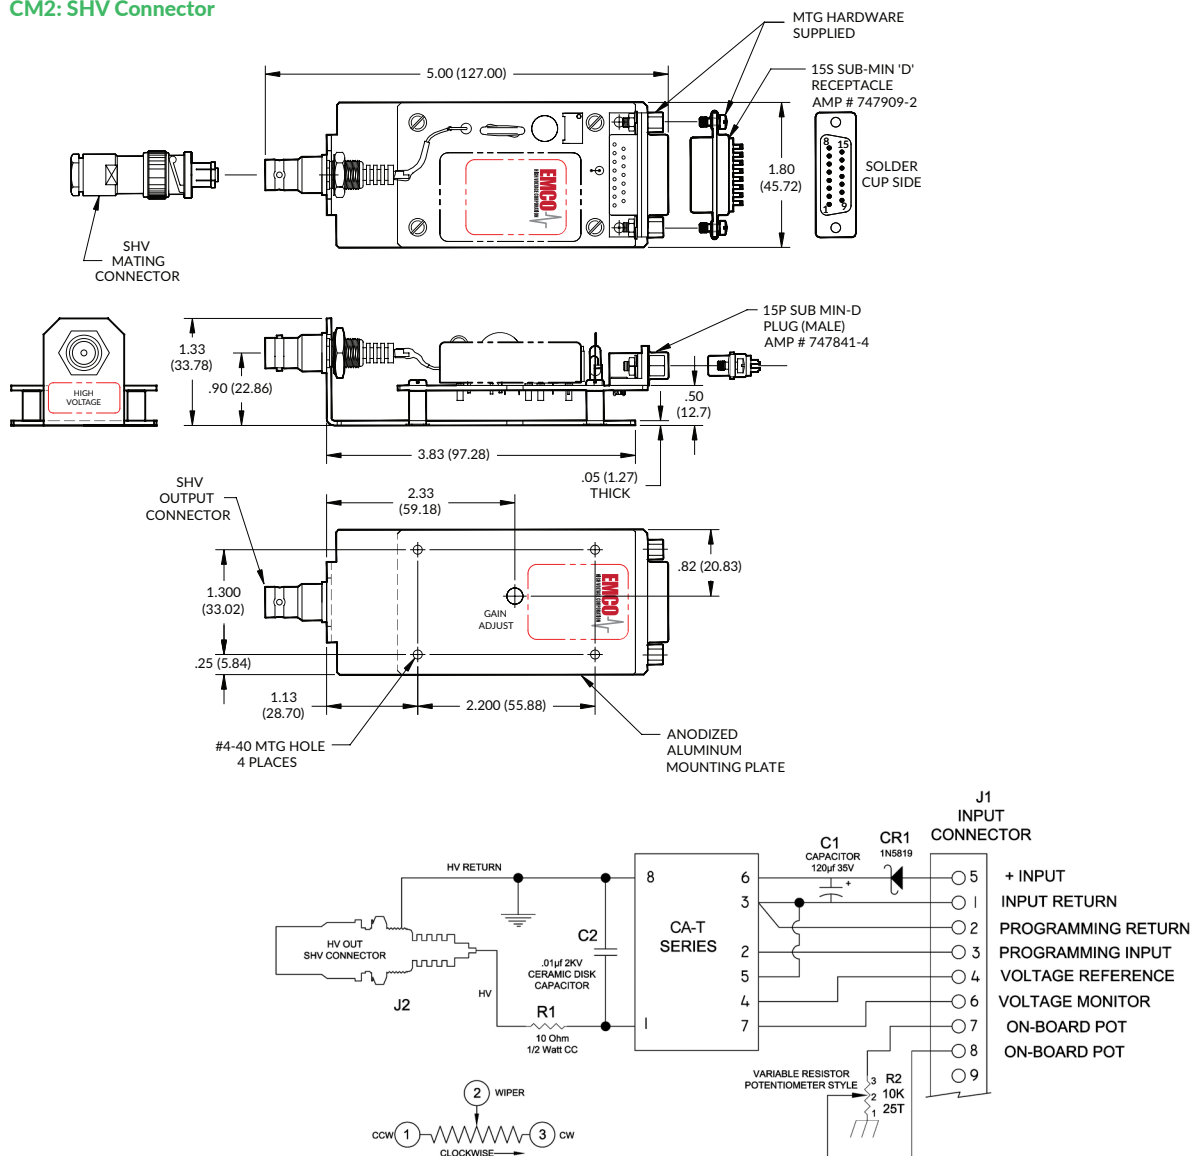

Product Description


These adapters provide convenient prototyping and evaluation during system development and integration. They allow the high voltage modules to be mounted to a chassis instead of designed into a PC board. Extra filtering on the input and output improves performance. A schottky diode on the input provides reverse polarity protection. Input connector is via a 15P SUB MIN-D plug (mate supplied) and output is via an SHV style coaxial connector (mate supplied). Please note when ordering, the high voltage module is not included and must be ordered separately.

Programming Instructions


Onboard Potentiometer: connect pins 7 to 4 and 8 to 3, turn potentiometer to adjust high voltage. Or Remote Potentiometer: connect wiper arm to pin 3, other sides to pins 4 and 2. Or Remote Analog Signal: apply programming voltage to pin 3, return to pin 2.

Application Notes

Connection Diagram for VREF programming

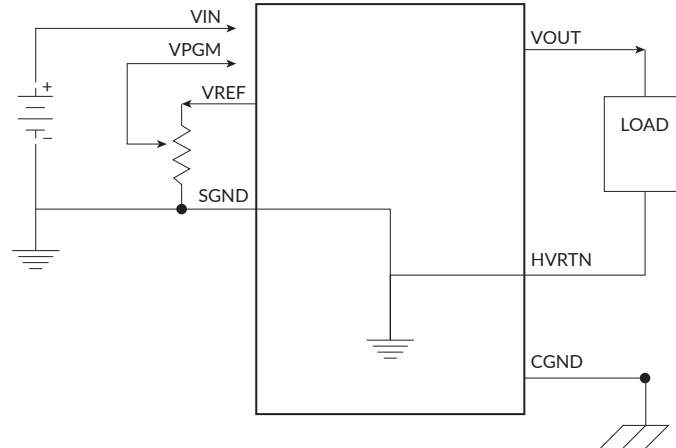

Programming Voltage vs Output Voltage

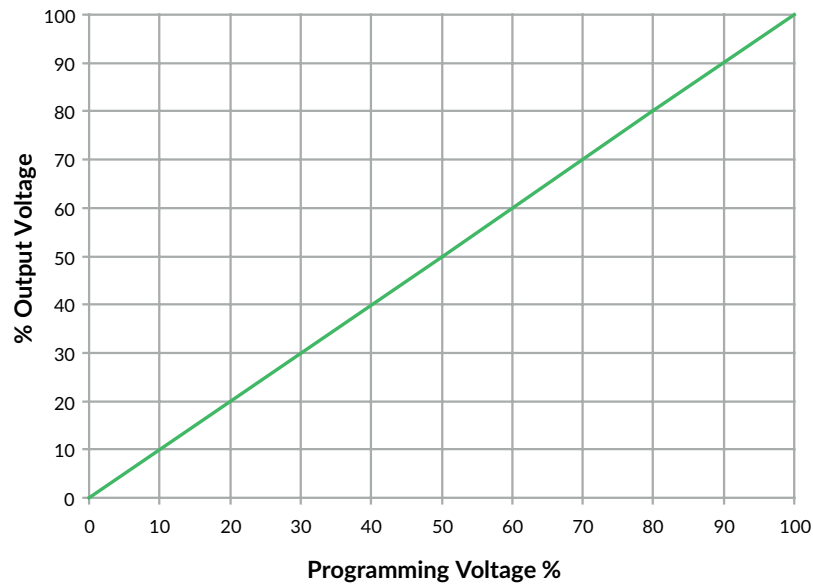

Sequencing

For the CA-T Series, it is recommended to wait at least 100msec after input power is applied before sending a voltage programming command.

Dynamic Response

In cases where the output voltage rises above the voltage programming command then settles. To mitigate this effect, ramp the voltage programming input at a slower rate until satisfactory results are achieved.

Specifications subject to change without notice.