

High Density DC-DC Modules




www.powersolve.co.uk

PS75W Series 37.5 - 75 Watt Wide Input DC-DC Converters Single Output

Features

- 37.5W - 75W Isolated Output
- Efficiency to 84%
- 300KHz Switching Frequency
- 4:1 Input Range
- Regulated Outputs
- Continuous Short Circuit Protection
- Five -Sided Metal Case
- Industry Standard Half-Brick Package

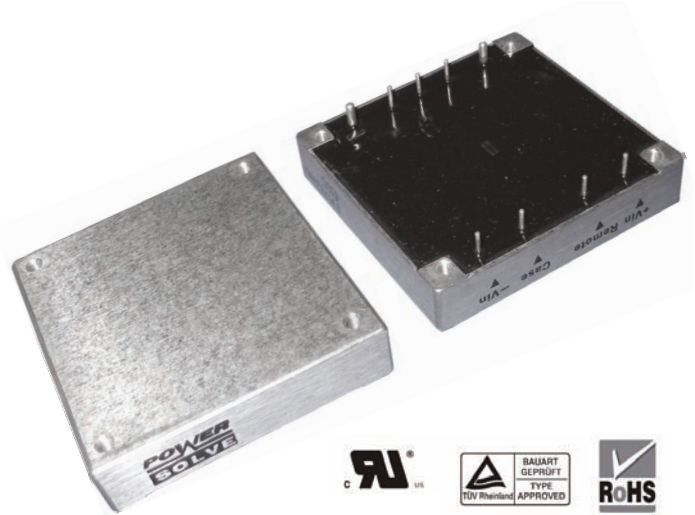

Electrical Specification

INPUT

Input Voltage Range	9-36V (24V nominal) 18-75V (48V nominal)
Undervoltage Lockout	8.8V (24Vin power up) 8.0V (24Vin power down) 17V (48Vin power up) 16V (48Vin power down)
Positive Logic Remote ON/OFF	Open collector ref. to -Input. Module ON: open circuit, Module OFF: <0.8VDC Add suffix N to model number for Negative Logic Remote ON/OFF control
Input Filter	PI Type

OUTPUT

Voltage Accuracy	±1% max.
Transient Response: 25% Step Load Change	<500msec
External Trim Adj. Range	±10%
Ripple & Noise, 20MHz BW	40mV RMS max, 100mV pk-pk max (3.3V & 5V outputs) 60mV RMS max, 150mV pk-pk max (12V & 15V outputs) 100mV RMS max, 240mV pk-pk max (24V output)

ENVIRONMENTAL

Temperature coefficient	+0.03%/°C
Short Circuit Protection	Continuous
Line Regulation	±0.2% max. measured over full input range
Load Regulation	±0.2% max. measured from 0-100% load
Over Voltage Protection trip range, % Vo nom.	115-140%
Current Limit	110%-160% Nominal Output

GENERAL

Efficiency	See table
Isolation Voltage	I/P-O/P, I/P-FG, O/P-FG: 1500VDC min
Isolation Resistance	10 ⁷ ohms min.
Switching Frequency	300KHz Typ.
Operating case Temperature	-40°C to +100°C
Storage Temperature	-55°C to +105°C
Thermal Shutdown, Case Temp.	+100°C Typ.
Dimensions	57.9 x 61.0 x 12.7 mm (2.82 x 2.40 x 0.50 inches)
Case Material	Aluminium

High Density DC-DC Modules



www.powersolve.co.uk

Output Voltage and Current Ratings


MODEL	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.
				NO LOAD	FULL LOAD	
PS75W-24S33	9-36 VDC	3.3 VDC	15A	50mA	2611mA	79
PS75W-24S05	9-36 VDC	5 VDC	15A	50mA	3811mA	82
PS75W-24S12	9-36 VDC	12 VDC	6.25A	50mA	3765mA	83
PS75W-24S15	9-36 VDC	15 VDC	5A	50mA	3720mA	84
PS75W-24S24	9-36 VDC	24 VDC	3.12A	50mA	3720mA	84
PS75W-48S33	18-75 VDC	3.3 VDC	15A	50mA	1289mA	80
PS75W-48S05	18-75 VDC	5 VDC	15A	50mA	1883mA	83
PS75W-48S12	18-75 VDC	12 VDC	6.25A	50mA	1860mA	84
PS75W-48S15	18-75 VDC	15 VDC	5A	50mA	1838mA	85
PS75W-48S24	18-75 VDC	24 VDC	3.12A	50mA	1835mA	85

NOTE: Nominal Input Voltage 24 or 48VDC

Mechanical and Connection Details

All dimensions in inches (mm)

Tolerances Inches x.xx ±0.02 x.xxx ±0.010
 Millimeters x.x ±0.5 x.xx ±0.25

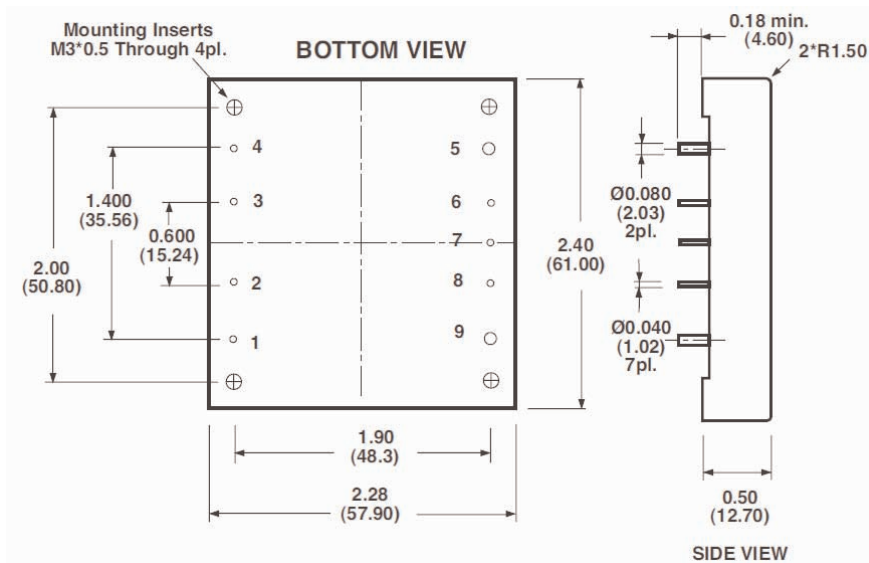


Pin Connection

Pin	Function
1	+Vin
2	ON/OFF
3	CASE
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

Remote ON/OFF Control

The PS75W Series allows the user to switch the module on and off electronically with the remote on/off feature. The PS75W Series are available with "positive logic" or "negative logic" (option).

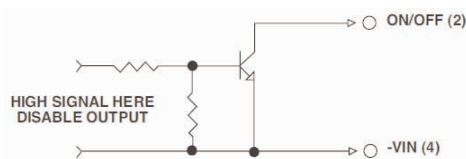

Logic Table

Logic State (Pin 2)	Negative Logic	Positive Logic
Logic low-Switch closed	Module on	Module off
Logic high-Switch open	Module off	Module on

All specifications typical at nominal line, full load and 25°C unless otherwise stated.


High Density DC-DC Modules



www.powersolve.co.uk


External Output Trim

The output can be trimmed externally ($\pm 10\%$) using a fixed resistor or a trimpot as shown.

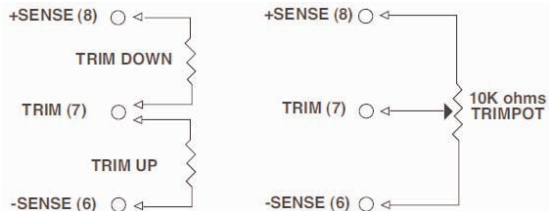

Output Noise

The output noise is measured with a 10 μ F tantalum and a 1.0 μ F ceramic capacitor across the output.

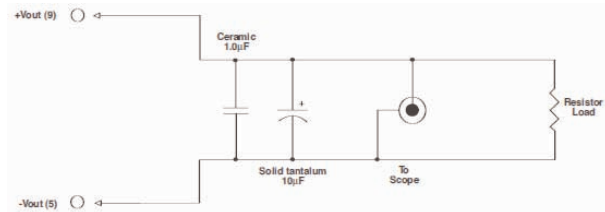


Application Note

Derating:

The case operating temperature range of the PS75W series is -40°C to $+100^{\circ}\text{C}$. When operating the PS75W series, proper derating or cooling is required.

Following is the derating curve for the PS75W without a heatsink; airflow along width (transverse).

Power Dissipated vs Ambient Temperature and Air Flow

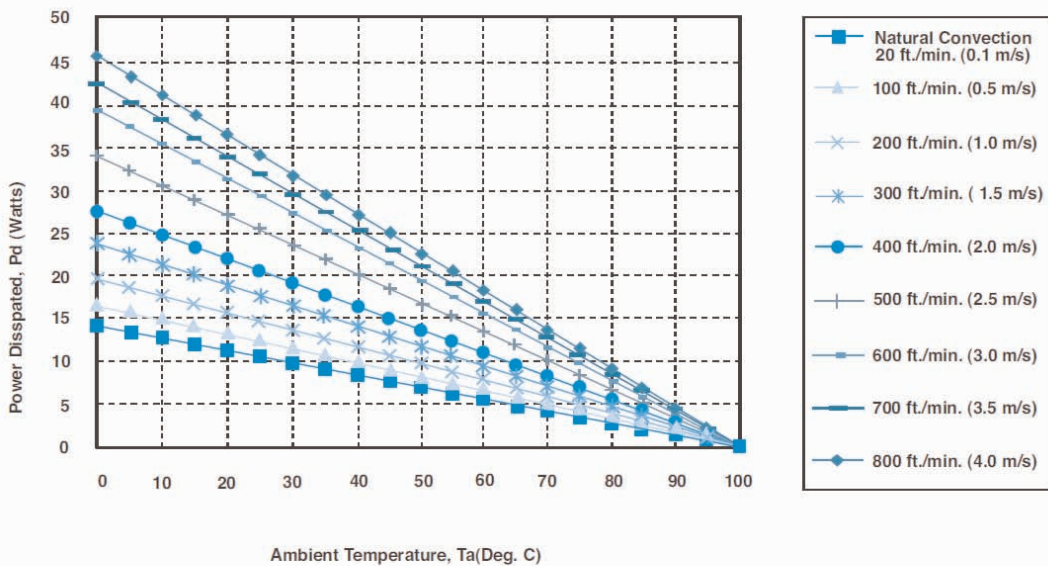

Forced Convection Power Derating without Heat Sink

Where:

The power dissipated (Pd):
 $Pd = Pi - Po = Po (1-n) / n$

The thermal resistances are listed below:

AIR FLOW RATE	TYPICAL Rca
Natural Convection 20ft./min. (0.1m/s)	7.12 $^{\circ}\text{C}/\text{W}$
100ft./min. (0.5m/s)	6.21 $^{\circ}\text{C}/\text{W}$
200ft./min. (1.0m/s)	5.17 $^{\circ}\text{C}/\text{W}$
300ft./min. (1.5m/s)	4.29 $^{\circ}\text{C}/\text{W}$
400ft./min. (2.0m/s)	3.64 $^{\circ}\text{C}/\text{W}$
500ft./min. (2.5m/s)	2.96 $^{\circ}\text{C}/\text{W}$
600ft./min. (3.0m/s)	2.53 $^{\circ}\text{C}/\text{W}$
700ft./min. (3.5m/s)	2.37 $^{\circ}\text{C}/\text{W}$
800ft./min. (4.0m/s)	2.19 $^{\circ}\text{C}/\text{W}$

The temperature rise (ΔT):

$$\Delta T = Pd * Rca$$