

DC-DC Power Adaptors

POWER
SOLVE

www.powersolve.co.uk

VDN60 Series 60 Watts Car Adaptor 12V to 24V Input



Features

- 11V to 28V DC Input
- Up to 60 Watts output power
- Input via standard cigar lighter plug
- Fully sealed plastic case
- LED power on indicator
- CE Mark
- EMI meets FCC Part 15 Class B & CISPR EN55022'B'
- High Efficiency

Electrical Specification


Input:	10.7 to 28V DC
Input Current:	6.8A Max 12V Input, 3.3A Max 24V Input
Input Fuse:	8A for 12V Input, 4A for 24V Input
Output Voltage:	See table
Voltage Tolerance:	5%
Output Power:	60 Watts Max
Output Protection:	Short circuit and over current protection
Overtemperature Protection:	Built In
Efficiency:	83% typical at full load and 12V DC Input
Ripple & Noise:	1% Max Pk-Pk (20MHz Bandwidth)
Operating Temperature:	0 to +40 °C
Storage Temperature:	-20 to +80 °C
EMI:	Meets FCC Part 15 Class B & CISPR EN55022 Class B

DC-DC Power Adaptors

**POWER
SOLVE**

www.powersolve.co.uk

MODEL	INPUT	OUTPUT
VDN60-12012		12V DC 2.1A
VDN60-15012		15V DC 4.0A
VDN60-16012		16V DC 3.75A
VDN60-18012	10.7 to 28V DC	18V DC 3.35A
VDN60-19012		19V DC 3.16A
VDN60-20012		20V DC 3.0A
VDN60-22012		22V DC 2.73A
VDN60-24012		24V DC 2.5A

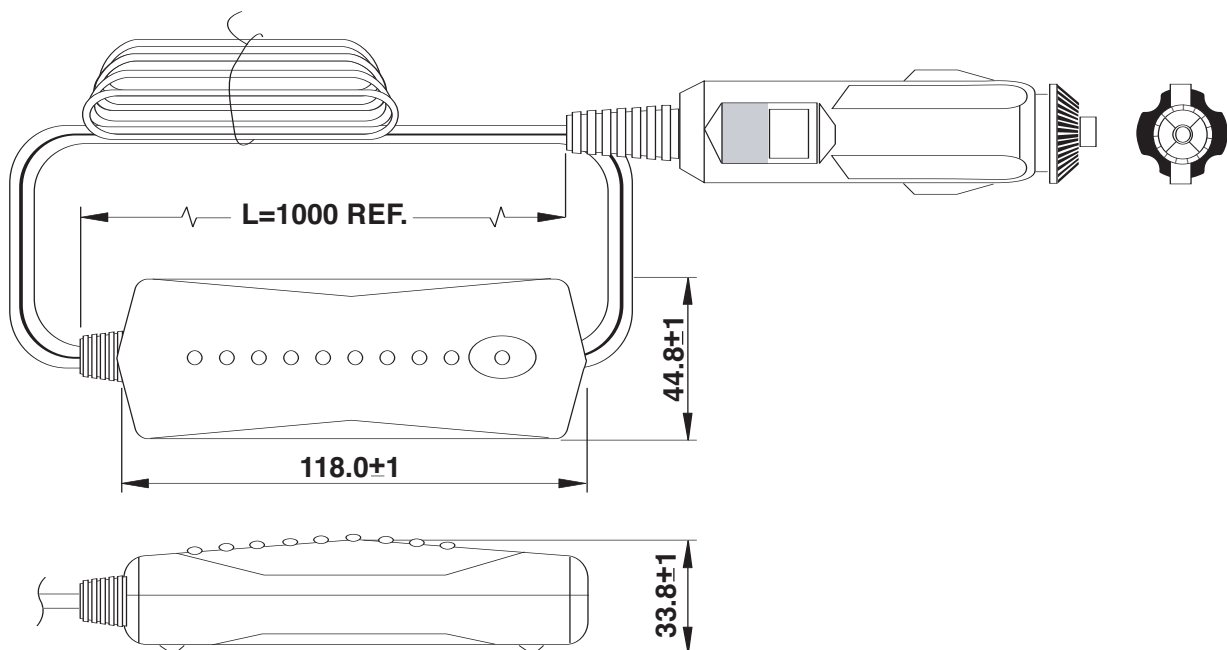

OUTPUT CABLE: Standard output cable fitted is 1.8 Metre terminated in 2.5 x 5.5 x 11mm barrel connector, wired centre positive. Other input and output connectors available consult sales office for details.

INPUT: All models are able to operate from a wide input range of 10.7 to 28V.