


Unit 8A  
Arnhem Road  
Newbury. RG14 5RU

Tel: +44 (0) 1635 521858  
Fax: +44 (0) 1635 523771  
www.powersolve.co.uk

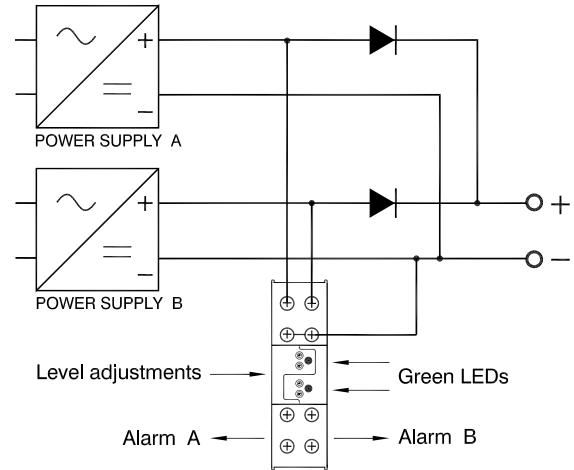

Monitoring two power supplies in redundant operation.

## AL24-48 - UNDER AND OVER VOLTAGE ALARM

2 channel alarm for use from 18 VDC to 64 VDC

### Features

- Large adjustment for use on both 24 VDC and 48 VDC
- Contains two window comparator circuits, isolated from each other
- Each has an isolated alarm contact
- Monitors the output voltages of two power supplies
- Between the levels of under and over voltage a green LED lights up

### Specification

- Undervoltage range : 18-48 V
- Overvoltage range : 24-64 V
- Insulation between circuits : 500 V DC
- Alarm contact : 100 mA / 30 V, Normally Closed
- Ambient temperature : - 20 to + 70 °C

### Dimensions

