


- Compact SIP-8 package
- I/O-isolation 1'600 VDC
- Fully regulated outputs
- Operating temperature range  
-40°C to +90°C
- Short circuit protection
- Remote On/Off
- 3-year product warranty
- Designed to meet  
UL 62368-1 (UL 60950-1)



TEC 3 is a new series with the design purpose to improve the prevalent 3 Watt SIP-8 DC/DC converters in terms of cost, efficiency and performance. The latest technology and components effectuate a high efficiency for a low thermal loss. This enables an operating temperature range from -40°C up to +90°C. The converters are fully regulated over 0 - 100% load (no minimum load is required). The low input range input is extended from 4.5 to 13.2 VDC while models are also available with the standard 2:1 input ranges of 9-18, 18-36 and 36-75 VDC (see TEC 3WI series for 4:1 input ranges). The functional I/O-isolation system is designed to meet IEC/EN 62368-1 with a test voltage (60 s) of 1600 VDC.

Models				
Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TEC 3-0910	4.5 – 13.2 VDC (9 VDC nominal)	3.3 VDC	700 mA	75 %
TEC 3-0911		5.0 VDC	600 mA	78 %
TEC 3-0919		9.0 VDC	333 mA	81 %
TEC 3-0912		12 VDC	250 mA	83 %
TEC 3-0913		15 VDC	200 mA	84 %
TEC 3-0915		24 VDC	125 mA	82 %
TEC 3-0921		±5.0 VDC	±300 mA	79 %
TEC 3-0922		±12 VDC	±125 mA	82 %
TEC 3-0923		±15 VDC	±100 mA	82 %
TEC 3-1210	9 – 18 VDC (12 VDC nominal)	3.3 VDC	700 mA	77 %
TEC 3-1211		5.0 VDC	600 mA	81 %
TEC 3-1219		9.0 VDC	333 mA	82 %
TEC 3-1212		12 VDC	250 mA	84 %
TEC 3-1213		15 VDC	200 mA	85 %
TEC 3-1215		24 VDC	125 mA	85 %
TEC 3-1221		±5.0 VDC	±300 mA	81 %
TEC 3-1222		±12 VDC	±125 mA	85 %
TEC 3-1223		±15 VDC	±100 mA	83 %
TEC 3-2410	18 – 36 VDC (24 VDC nominal)	3.3 VDC	700 mA	77 %
TEC 3-2411		5.0 VDC	600 mA	82 %
TEC 3-2419		9.0 VDC	333 mA	83 %
TEC 3-2412		12 VDC	250 mA	85 %
TEC 3-2413		15 VDC	200 mA	86 %
TEC 3-2415		24 VDC	125 mA	84 %
TEC 3-2421		±5.0 VDC	±300 mA	82 %
TEC 3-2422		±12 VDC	±125 mA	84 %
TEC 3-2423		±15 VDC	±100 mA	85 %
TEC 3-4810	36 – 75 VDC (48 VDC nominal)	3.3 VDC	700 mA	75 %
TEC 3-4811		5.0 VDC	600 mA	80 %
TEC 3-4819		9.0 VDC	333 mA	82 %
TEC 3-4812		12 VDC	250 mA	84 %
TEC 3-4813		15 VDC	200 mA	85 %
TEC 3-4815		24 VDC	125 mA	86 %
TEC 3-4821		±5.0 VDC	±300 mA	80 %
TEC 3-4822		±12 VDC	±125 mA	86 %
TEC 3-4823		±15 VDC	±100 mA	83 %

## Input Specifications

Input current at no load	9 Vin models: 55 mA typ. 12 Vin models: 30 mA typ. 24 Vin models: 12 mA typ. 48 Vin models: 8 mA typ.	
Surge voltage (1 s max.)	9 Vin models: 15 V max. 12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.	
Start up voltage	9 Vin models: 4.5 V (or lower) 12 Vin models: 9 V (or lower) 24 Vin models: 18 V (or lower) 48 Vin models: 36 V (or lower)	
Under voltage shut down	9 Vin models: 2 - 4 V 12 Vin models: 6 - 8 V 24 Vin models: 13 - 17 V 48 Vin models: 29 - 35 V	
Input filter	internal capacitor	
Recommended input fuse	9 Vin models: 1.6 A (slow blow type) 12 Vin models: 0.8 A (slow blow type) 24 Vin models: 0.5 A (slow blow type) 48 Vin models: 0.315 A (slow blow type)	
Conducted noise	EN 55032 class A or B with external components	
EMC immunity	<ul style="list-style-type: none"> <li>- ESD (electrostatic discharge)</li> <li>- Radiated immunity</li> <li>- Fast transient / surge (with external input capacitor)</li> <li>- Conducted immunity</li> <li>- Magnetic field immunity</li> </ul>	<p>EN 61000-4-2, air <math>\pm 8</math> kV, contact <math>\pm 6</math> kV, perf. criteria A</p> <p>EN 61000-4-3, 10 V/m, perf. criteria A</p> <p>EN 61000-4-4, <math>\pm 2</math> kV, perf. criteria A</p> <p>EN 61000-4-5, <math>\pm 1</math> kV perf. criteria A</p> <p>all models: Nippon chemi-con KY 220<math>\mu</math>F/100V</p> <p>EN 61000-4-6, 10 Vrms, perf. criteria A</p> <p>EN 61000-4-8</p> <p>100 A/m, continuous, perf. criteria A</p> <p>1000 A/m, 1 sec., perf. criteria A</p>

## Output Specifications

Voltage set accuracy	$\pm 1$ % max.	
Regulation	<ul style="list-style-type: none"> <li>- Input variation (Vin min. to Vin max.)</li> <li>- Load variation (0 - 100 %)</li> <li>- Load variation (10 - 90 %)</li> <li>- Cross regulation</li> </ul>	<p>0.2 % max.</p> <p>single output: 1 % max. dual output: 1 % max. (balanced load)</p> <p>single output: 0.5 % max. dual output: 0.8 % max. (balanced load)</p> <p>dual output: 5 % max. (asymmetrical load 25 % / 100 %)</p>
Temperature coefficient	$\pm 0.02$ %/K max.	
Ripple and noise (20 MHz Bandwidth)	75 mVp-p typ.	
Current limitation	140 - 240 % of Iout max.	
Short circuit protection	continuous, automatic recovery	
Start up time (constant resistive load)	<ul style="list-style-type: none"> <li>- Power ON</li> <li>- Remote ON</li> </ul>	<p>10 ms typ. / 20 ms max.</p> <p>10 ms typ. / 20 ms max.</p>
Transient response time (25% load step change)	500 $\mu$ s typ.	

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### Output Specifications (continued)

Capacitive load	– Single output	3.3 Vout models: 4400 µF max. 5.0 Vout models: 2200 µF max. 9.0 Vout models: 1300 µF max. 12 Vout models: 1000 µF max. 15 Vout models: 820 µF max. 24 Vout models: 470 µF max.
	– Dual output	±5.0 Vout models: 1200 µF max. (each output) ±12 Vout models: 520 µF max. (each output) ±15 Vout models: 440 µF max. (each output)



### General Specifications

Temperature ranges	– Operating (natural convection: 20 LFM, 0.1 m/s) – Case temperature – Storage temperature	–40°C to +90°C +105°C max. –55°C to +125°C
Derating		3.4%/K above 75°C
Humidity (non condensing)		5 – 95 % rel H max.
Isolation voltage	– I/O isolation voltage (60 s)	1'600 VDC
Isolation resistance (input/output)		1 GOhm min.
Isolation capacitance (input/output)		50 pF max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		5'124'000 h
Switching frequency		100 kHz min. (pulse frequency modulation)
Shock, vibration and thermal shock		MIL-STD-810F
Remote On/Off	– On: – Off: – Off idle current:	open circuit or high impedance 2 – 4 mA current applied via 1kOhm resistor 2.5 mA typ.
Safety standards	– Desinged to meet (no certification)	IEC/EN/UL 62368-1, UL 60950-1
Environmental compliance	– Reach – RoHS	RoHS directive 2011/65/EU

### Physical Specifications

Casing material	non-conducting black plastic
Potting material	Silicone (UL 94V-0 rated)
Pin material	tinned copper
Package weight	4.5 g (0.16 oz)
Soldering profile	260°C / 10 s max. (wave soldering)

Outline Dimensions

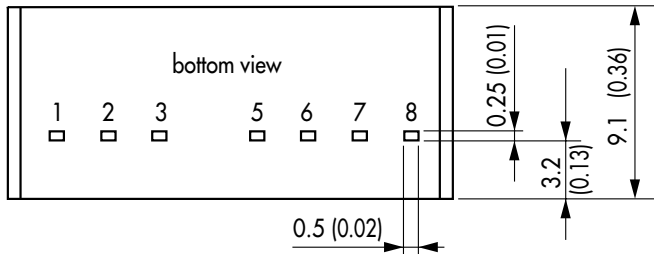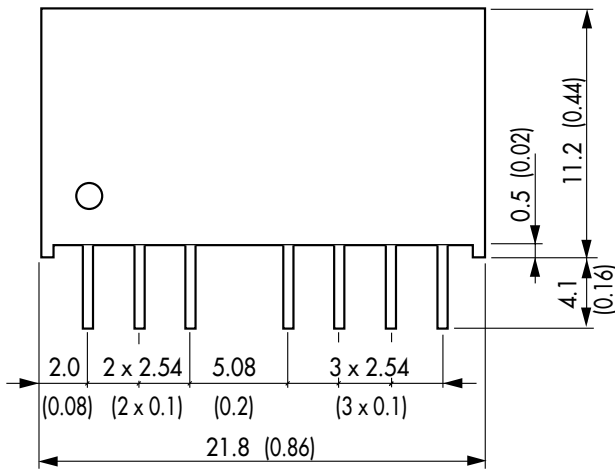

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (VCC)	+Vin (VCC)
3	On/Off	On/Off
5	NC	NC
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

NC: not connected

Dimensions in [mm], () = Inch

Tolerances: x.xx ±0.5 (±0.02)

Pin pitch tolerances ±0.25 (±0.01)

Pin dimension tolerance ±0.1 (±0.004)