

## DC/DC Converter

## THM 3 Series, 3 Watt

- Wide 2:1 input voltage 3 W DC/DC converter in a compact DIP-24 plastic case
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2xMOPP
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Low leakage current < 2µA
- Extended operating temperature range -40°C to 90°C.
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- Operating up to 5000m altitude
- 5 year product warranty



**CB**  
Scheme  
IEC 60601-1    ES 60601-1



The THM-3 series is a range of medical 3 Watt DC/DC converters in DIP-24 plastic package and with wide 2:1 input voltage range. They provide a reinforced isolation system for 5000 VACrms isolation and a very low leakage current of less than 2 µA. The units are approved to IEC/EN/ES 60601-1 3rd edition for 2 x MOPP (Means Of Patient Protection) and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 87.5% and highest grade components the converters can reliably operate in an ambient temperature range of -40°C up to +90°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

### Models

Order code*	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THM 3-0510	4.5 – 9 VDC (5 VDC nominal)	3.3 VDC	1000 mA	81.0 %
THM 3-0511		5.0 VDC	600 mA	84.5 %
THM 3-0512		12 VDC	250 mA	85.5 %
THM 3-0513		15 VDC	200 mA	87.5 %
THM 3-0515		24 VDC	125 mA	85.5 %
THM 3-0521		±5.0 VDC	±300 mA	83.0 %
THM 3-0522		±12 VDC	±125 mA	86.0 %
THM 3-0523		±15 VDC	±100 mA	86.0 %
THM 3-1210	9.0 – 18 VDC (12 VDC nominal)	3.3 VDC	1000 mA	82.0 %
THM 3-1211		5.0 VDC	600 mA	84.5 %
THM 3-1212		12 VDC	250 mA	87.0 %
THM 3-1213		15 VDC	200 mA	87.0 %
THM 3-1215		24 VDC	125 mA	87.0 %
THM 3-1221		±5.0 VDC	±300 mA	83.5 %
THM 3-1222		±12 VDC	±125 mA	87.5 %
THM 3-1223		±15 VDC	±100 mA	86.5 %
THM 3-2410	18 – 36 VDC (24 VDC nominal)	3.3 VDC	1000 mA	82.0 %
THM 3-2411		5.0 VDC	600 mA	84.5 %
THM 3-2412		12 VDC	250 mA	87.0 %
THM 3-2413		15 VDC	200 mA	87.0 %
THM 3-2415		24 VDC	125 mA	87.0 %
THM 3-2421		±5.0 VDC	±300 mA	83.0 %
THM 3-2422		±12 VDC	±125 mA	87.0 %
THM 3-2423		±15 VDC	±100 mA	86.0 %
THM 3-4810	36 – 75 VDC (48 VDC nominal)	3.3 VDC	1000 mA	81.0 %
THM 3-4811		5.0 VDC	600 mA	84.0 %
THM 3-4812		12 VDC	250 mA	87.0 %
THM 3-4813		15 VDC	200 mA	86.5 %
THM 3-4815		24 VDC	125 mA	86.5 %
THM 3-4821		±5.0 VDC	±300 mA	83.0 %
THM 3-4822		±12 VDC	±125 mA	86.0 %
THM 3-4823		±15 VDC	±100 mA	86.0 %

\* Suffix **-B2** for trim option with adjustable output

Suffix **-B3** for remote-control option

Suffix **-B4** for trim + remote-control option

**Input Specifications**

Input current no load	5 Vin models: 20 mA typ. 12 Vin models: 10 mA typ. 24 Vin models: 6 mA typ. 48 Vin models: 4 mA typ.	
Surge voltage (3 s max.)	5 Vin models: 16 V max. 12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.	
Start-up voltage	5 Vin models: 4.5 VDC (or lower) 12 Vin models: 9 VDC (or lower) 24 Vin models: 18 VDC (or lower) 48 Vin models: 36 VDC (or lower)	
Startup time	30 ms	
Under voltage shut down	5 Vin models: 4 VDC typ. 12 Vin models: 8 VDC typ. 24 Vin models: 16 VDC typ. 48 Vin models: 33 VDC typ.	
EMC emissions	– Conducted & Radiated input suppression	EN 55011 limits to IEC 60601-1-2 4th edition EN 55032 class A (internal filter)
EMC immunity	<ul style="list-style-type: none"> <li>– Generic for Medical equipment</li> <li>– ESD (electrostatic discharge)</li> <li>– Radiated immunity</li> <li>– Fast transient / surge (with external input capacitor / diode)</li> <li>– Conducted immunity</li> <li>– Magnetic field immunity</li> </ul>	IEC/EN 60601-1-2 4th edition EN 61000-4-2, air $\pm 8$ kV, contact $\pm 6$ kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 2$ kV perf. criteria A 5 Vin models: Nippon chemi-con KY 1000 $\mu$ F/ 25 V and reverse diode (Vishay V10P45) in parallel 12 & 24 Vin models: Nippon chemi-con KY 470 $\mu$ F/ 50 V 48 Vin models: Nippon chemi-con KY 330 $\mu$ F/ 100 V EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A
External input fuse required (recommended values, slow blow type)	5 Vin models: 1.6 A 12 Vin models: 0.8 A 24 Vin models: 0.5 A 48 Vin models: 0.315 A	

## Output Specifications

Voltage set accuracy	$\pm 1\% \text{ max.}$	
Output voltage adjustment (for THM 3 -B2 / -B4 option models only)		
– Single output	15 & 24 Vout models:	<b>-10 / +20%</b>
	other models:	<b><math>\pm 10\%</math></b>
– Dual output	5, 12 & 15 Vout models:	<b><math>\pm 10\%</math></b>
Regulation	– Input variation	single output: <b>0.2 % max.</b> dual output: <b>0.5 % max.</b>
	– Load variation 0 – 100 %	single output: <b>0.2 % max.</b> dual output: <b>1.0 % max.</b>
	– Cross regulation	dual output: <b>5.0 % max.</b> (asymmetrical load 25/100%)
Minimum load	not required	
Ripple and noise (20 MHz Bandwidth)	3.3 & 5.0 Vout models:	<b>30 mVp-p typ.</b> with cap. 10 $\mu\text{F}$ /25V X7R MLCC
	12 & 15 Vout models:	<b>40 mVp-p typ.</b> with cap. 10 $\mu\text{F}$ /25V X7R MLCC
	24 Vout models:	<b>50 mVp-p typ.</b> with cap. 4.7 $\mu\text{F}$ /50V X7R MLCC
Transient response	– Recovery time (25% load step change)	<b>250 <math>\mu\text{s}</math> typ.</b>
Over load protection	at 150 % typ. of Iout rated (hiccup mode)	
Short circuit protection	Continuous, automatic recovery	
Over voltage protection	– Single output	3.3 Vout models: <b>3.7 – 5.0 VDC</b> 5.0 Vout models: <b>5.6 – 7.0 VDC</b> 12 Vout models: <b>13.5 – 16.0 VDC</b> 15 Vout models: <b>18.3 – 22.0 VDC</b> 24 Vout models: <b>29.1 – 34.5 VDC</b> $\pm 5$ Vout models: <b>5.6 – 7.0 VDC</b> $\pm 12$ Vout models: <b>13.5 – 18.2 VDC</b> $\pm 15$ Vout models: <b>17.0 – 22.0 VDC</b>

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### General Specifications

Capacitive load	<ul style="list-style-type: none"> <li>– Single output</li> <li>– Dual output</li> </ul>	3.3 Vout models: 1'050 µF max. 5.0 Vout models: 750 µF max. 12 Vout models: 130 µF max. 15 Vout models: 100 µF max. 24 Vout models: 39 µF max. ±5 Vout models: 430 µF max. (each output) ±12 Vout models: 75 µF max. (each output) ±15 Vout models: 56 µF max. (each output)
Temperature ranges	<ul style="list-style-type: none"> <li>– Operating (designed for)</li> <li>– Rated according to IEC/EN 60601-1</li> <li>– Case temperature</li> <li>– Storage temperature</li> </ul>	-40°C to +90°C (without derating) -40°C to +80°C (without derating) +105°C max. c55°C to +125°C
Thermal impedance		18K/W
Humidity (non condensing)		5 % to 95 % rel H max.
Isolation voltage (50 Hz, 60 s)	– to meet ES/IEC/EN 60601-1	5000 VACrms, rated for 250 VACrms working voltage, 2 × MOPP
Clearance/creepage		8 mm min.
Leakage Current (at 240VAC, 60Hz)		2 µA max.
Isolation capacitance (input/output)		17 pF max.
Altitude during operation		5000 m
Temperature coefficient		±0.02 %/K typ.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		6'400'000 h
Switching frequency		150 kHz ±15 kHz (pulse width modulation)
Vibration and thermal shock resistance		according to MIL-STD-810F
Remote On/Off (for THM 3 -B3 / -B4 option models only)	<ul style="list-style-type: none"> <li>– Off</li> <li>– On</li> <li>– Off idle current</li> <li>– Remote pin input current</li> </ul>	2.2 – 12 VDC (referred to -Vin pin) open circuit or 0 – 1.2 VDC (referred to -Vin pin) 2.5 mA typ. -0.5 mA min. 1 mA max.
Safety standards/approvals	– Medical equipment	ANSI/AAMI ES60601-1:2005/(R)2012, IEC/EN60601-1 3rd
Environmental compliance	<ul style="list-style-type: none"> <li>– Reach</li> <li>– RoHS</li> </ul>	RoHS directive 2011/65/EU

### Physical Specifications

Casing material	non-conductive black plastic
Base material	non-conductive black plastic
Potting material	silicone (UL94 V-0 rated)
Package weight	14 g (0.48 oz)
Soldering temperature	265°C / 10 s max.




- The component is not be used in an oxygen rich environment.
- The component is not to be used in conjunction with flammable anaesthetics and agents.
- The component has to be disposed appropriately. Please refer to local regulations (Waste Electrical and Electronic Equipment).
- A modification of the component is not allowed.


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

## Outline Dimensions


Standard pinning

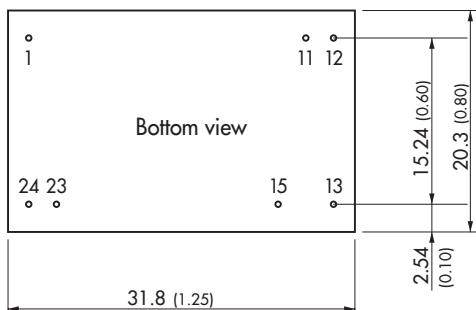


Standard Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
11	No pin	Common
12	-Vout	No pin
13	+Vout	-Vout
15	No pin	+Vout
23	-Vin (GND)	-Vin (GND)
24	-Vin (GND)	-Vin (GND)

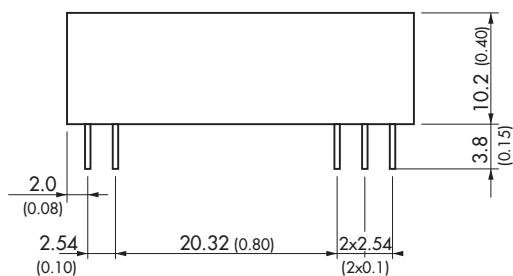

Optional pinning with options: suffix **-B1** (alternative pinning); **-B2** (with Trim); **-B3** (with Remote); **-B4** (with Trim and Remote)

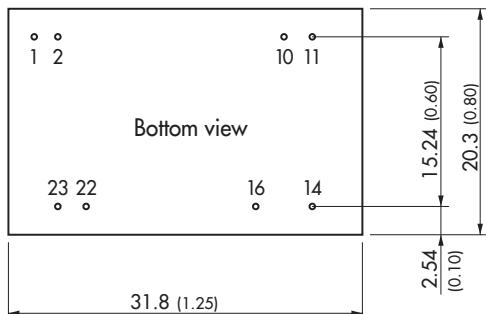

Optional Pinout		
Pin	Single	Dual
1	No Pin*/Remote	No Pin*/Remote
2	-Vin (GND)	-Vin (GND)
10	No Pin*/Trim	No Pin*/Trim
11	No con.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

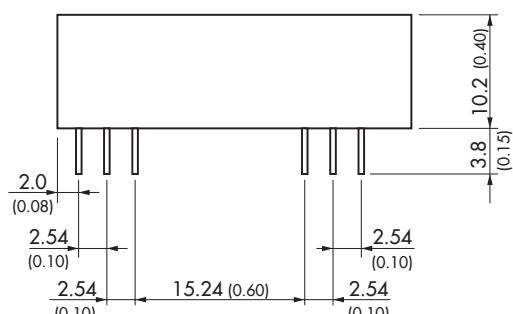

\*If Remote or Trim is not selected there is no pin on corresponding number

Remark: No suffix **-Bx** for 5 Vin models. Corresponding parts are with THM 3WI series by default.

Dimensions in [mm], () = Inch  
Tolerances  $\pm 0.5$  ( $\pm 0.02$ )  
Pin  $\varnothing 0.6 \pm 0.1$  ( $0.024 \pm 0.004$ )  
Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )