

## DC/DC Converter

## TEL 6WI Series, 6 Watt

- Ultra compact 6 Watt converter in DIP-16 metal casing
- High power density of 1,6W/cm<sup>3</sup>
- 6-side shielded metal case with insulated baseplate
- Wide 4:1 input voltage range: 4.5-18, 9-36, 18-75 VDC
- High efficiency (up to 87%) for low thermal loss
- Operating temperature range -40°C to +85°C
- Meets EN 55032 class A (conducted and radiated) with a single input capacitor
- Protection against short circuit
- 3-year product warranty



The TEL 6WI is an isolated 6 Watt converters series which comes in an ultra compact DIP-16 metal package. It solidifies the new package standard in this power range with a power density of 1,6 W/cm<sup>3</sup> which almost doubles the power density compared to 6 Watt converters in DIP-24 packages. The TEL 6WI offers a wide 4:1 input voltage range and featured a high efficiency of up to 87% which enables an operation temperature of up to +70°C at full load and up to 85°C with 60% load. With only a single input capacitor (SMD) the converters comply with conducted and radiated emission standard EN 55032 class A. Overall they feature an economical solution for space critical and cost sensitive applications in instrumentation, IT and industrial electronics.

Models						
Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I <sub>max</sub>	Vnom	I <sub>max</sub>	
TEL 6-1211WI	4.5 - 18 VDC (12 VDC nom.)	5 VDC	1'200 mA			82 %
TEL 6-1212WI		12 VDC	500 mA			85 %
TEL 6-1213WI		15 VDC	400 mA			86 %
TEL 6-1215WI		24 VDC	250 mA			87 %
TEL 6-1222WI		+12 VDC	250 mA	-12 VDC	250 mA	85 %
TEL 6-1223WI		+15 VDC	200 mA	-15 VDC	200 mA	85 %
TEL 6-2411WI	9 - 36 VDC (24 VDC nom.)	5 VDC	1'200 mA			81 %
TEL 6-2412WI		12 VDC	500 mA			84 %
TEL 6-2413WI		15 VDC	400 mA			84 %
TEL 6-2415WI		24 VDC	250 mA			85 %
TEL 6-2422WI		+12 VDC	250 mA	-12 VDC	250 mA	85 %
TEL 6-2423WI		+15 VDC	200 mA	-15 VDC	200 mA	84 %
TEL 6-4811WI	18 - 75 VDC (48 VDC nom.)	5 VDC	1'200 mA			81 %
TEL 6-4812WI		12 VDC	500 mA			85 %
TEL 6-4813WI		15 VDC	400 mA			85 %
TEL 6-4815WI		24 VDC	250 mA			85 %
TEL 6-4822WI		+12 VDC	250 mA	-12 VDC	250 mA	86 %
TEL 6-4823WI		+15 VDC	200 mA	-15 VDC	200 mA	86 %

## Input Specifications

Input Current	- At no load	12 Vin models: <b>12 mA typ.</b> 24 Vin models: <b>10 mA typ.</b> 48 Vin models: <b>10 mA typ.</b>
	- At full load	12 Vin models: <b>587 mA typ.</b> 24 Vin models: <b>299 mA typ.</b> 48 Vin models: <b>148 mA typ.</b>
Surge Voltage		12 Vin models: <b>25 VDC max.</b> (1 s max.) 24 Vin models: <b>50 VDC max.</b> (1 s max.) 48 Vin models: <b>100 VDC max.</b> (1 s max.)
Under Voltage Lockout		12 Vin models: <b>3 VDC min. / 3.5 VDC typ.</b> 24 Vin models: <b>5.5 VDC min. / 6.5 VDC typ.</b> 48 Vin models: <b>12 VDC min. / 15.5 VDC typ.</b>
Reflected Ripple Current		<b>50 mAp-p typ.</b>
Recommended Input Fuse		12 Vin models: <b>3'150 mA</b> (slow blow) 24 Vin models: <b>2'000 mA</b> (slow blow) 48 Vin models: <b>1'000 mA</b> (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		<b>Internal Pi-Type</b>

## Output Specifications

Voltage Set Accuracy		<b>±2% max.</b>
Regulation	- Input Variation (Vmin - Vmax)	single output models: <b>0.5% max.</b> dual output models: <b>0.5% max.</b> (Output 1) <b>1% max.</b> (Output 2)
	- Load Variation (5 - 100%)	single output models: <b>1% max.</b> dual output models: <b>1% max.</b> (Output 1) <b>1.5% max.</b> (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models: <b>5% max.</b>
Ripple and Noise (20 MHz Bandwidth)		12 Vin models: <b>120 mVp-p max.</b> 24 Vin models: <b>120 mVp-p max.</b> 48 Vin models: <b>200 mVp-p max.</b> (To further reduce Ripple and Noise, the two capacitors 1 µF MLCC    10µF Tantalum are recommended.)
Capacitive Load	- single output	5 Vout models: <b>1'000 µF max.</b> 12 Vout models: <b>470 µF max.</b> 15 Vout models: <b>220 µF max.</b> 24 Vout models: <b>100 µF max.</b>
	- dual output	12 / -12 Vout models: <b>330 / 330 µF max.</b> 15 / -15 Vout models: <b>220 / 220 µF max.</b>
Minimum Load		<b>Not required</b>
Temperature Coefficient		<b>±0.03 %/K max.</b>
Start-up Time		<b>150 ms max.</b>
Short Circuit Protection		<b>Continuous, Automatic recovery</b>
Output Current Limitation		<b>110 - 230% of Iout max.</b> <b>160% typ. of Iout max.</b>
Transient Response	- Response Deviation	<b>5% typ. / 8% max.</b> (25% Load Step) (5 Vout models) <b>3% typ. / 5% max.</b> (25% Load Step) (other models)
	- Response Time	<b>300 µs typ. / 500 µs max.</b> (25% Load Step)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

### Safety Specifications

Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	<a href="http://www.tracopower.com/overview/tel6wi">www.tracopower.com/overview/tel6wi</a>
Pollution Degree		PD 2

### EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (with external filter) EN 55032 class B (with external filter)
	External filter proposal:	<a href="http://www.tracopower.com/overview/tel6wi">www.tracopower.com/overview/tel6wi</a> (Note: Class A emissions can be met using only a single input capacitor.)
EMS Immunity	- Electrostatic Discharge	Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A Contact: EN 61000-4-2, $\pm 6$ kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, $\pm 2$ kV, perf. criteria A EN 61000-4-5, $\pm 2$ kV, perf. criteria A
	- Conducted RF Disturbances	External filter proposal: <a href="http://www.tracopower.com/overview/tel6wi">www.tracopower.com/overview/tel6wi</a> EN 61000-4-6, 10 Vrms, perf. criteria A

### General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	Depending on model
		See application note: <a href="http://www.tracopower.com/overview/tel6wi">www.tracopower.com/overview/tel6wi</a>
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Regulator Topology		Flyback Converter
Switching Frequency		36 - 427 kHz (PWM, PFM) (Above 50% load PWM is used, below 50% load PFM is used)
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s	1'500 VDC
Isolation Resistance	- Input to Output, 500 VDC	1'000 M $\Omega$ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	2'200 pF typ.
Reliability	- Calculated MTBF	1'000'000 h (MIL-HDBK-217F, ground benign)
Washing Process		According to Cleaning Guideline <a href="http://www.tracopower.com/info/cleaning.pdf">www.tracopower.com/info/cleaning.pdf</a>
Environment	- Vibration	IEC 60068-2-6 5 g, 3 axis, random waveform, 10-150 Hz
	- Mechanical Shock	IEC 60068-2-27 15 g, 3 axis, half sine, 11 ms
	- Thermal Shock	IEC 60068-2-14
Housing Material		Alu alloy, black anodized coating
Base Material		Rynite® FR530 BK507
Potting Material		Epoxy (UL 94 V-0 rated)
Pin Material		Brass
Pin Foundation Plating		Nickel (1 - 3 $\mu$ m)
Pin Surface Plating		Gold (50 - 75 nm), glossy
Housing Type		Metal Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.


Footprint Type	DIP16
Soldering Profile	Lead-Free Wave Soldering 265°C / 10 s max.
Weight	7.5 g
Thermal Impedance	- Case to Ambient 20 K/W typ. (at Vin min.)
Environmental Compliance	- REACH Declaration <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> REACH SVHC list compliant REACH Annex XVII compliant - RoHS Declaration <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a> Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule)) - SCIP Reference Number d16381e8-40dd-4d44-9951-68eaf8f4e86c

### Supporting Documents

Overview Link (for additional Documents)

[www.tracopower.com/overview/tel6wi](http://www.tracopower.com/overview/tel6wi)

### Outline Dimensions

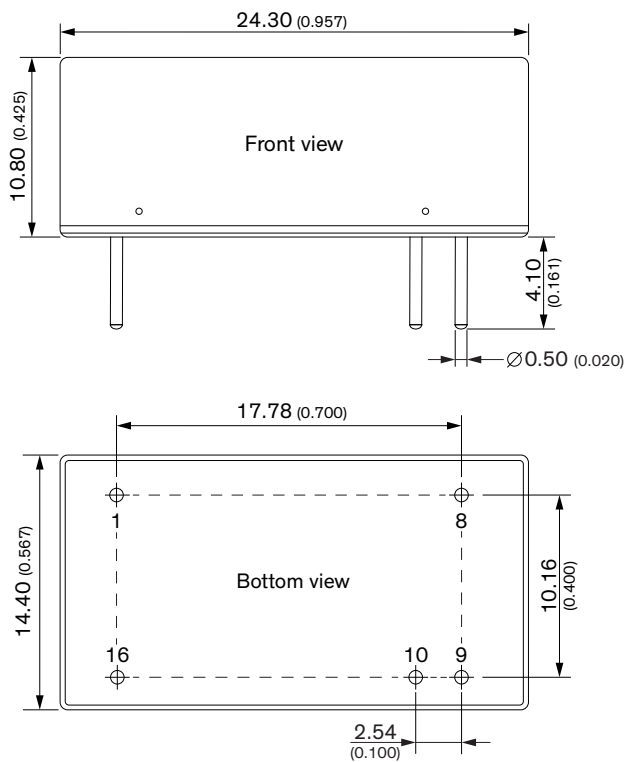

Dimensions in mm (inch)  
Pin diameter tolerances:  $\pm 0.10$  ( $\pm 0.004$ )  
General tolerances:  $\pm 0.50$  ( $\pm 0.020$ )

Pinout		
Pin	Single	Dual
1	-Vin (GND)	
8	NTC	Common
9	+Vout	
10	-Vout	
16	+Vin (Vcc)	

NTC: Not to connect