


DC/DC Converter

TMR 3WISM Series, 3 Watt

- Ultra wide 4:1 Input: 4.5–12, 9–36 and 18–75 VDC
- I/O-isolation 1'500 VDC
- Fully regulated outputs
- Operating temperature range –40°C to +80°C
- Protection against short circuit
- Remote On/Off
- 3-year product warranty

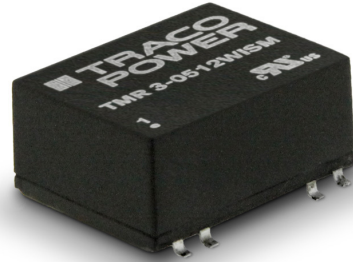

The TMR 3WISM Series is a set of 3 Watt SMD DC/DC converters. They operate up to 65°C environment temperature at full load or up to 80°C with a 50% load derating. With UL 60950-1 certification, 1'500 VDC I/O-isolation voltage, external On/Off and short current protection they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (4:1) and minimum load is not required.

Models				
Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMR 3-0511WISM	4.5 – 12 VDC (9 VDC nominal)	5.0 VDC	600 mA	81 %
TMR 3-0512WISM		12 VDC	250 mA	84 %
TMR 3-0513WISM		15 VDC	200 mA	84 %
TMR 3-0515WISM		24 VDC	125 mA	84 %
TMR 3-0522WISM		±12 VDC	±125 mA	83 %
TMR 3-0523WISM		±15 VDC	±100 mA	83 %
TMR 3-2411WISM	9 – 36 VDC (24 VDC nominal)	5.0 VDC	600 mA	80 %
TMR 3-2412WISM		12 VDC	250 mA	85 %
TMR 3-2413WISM		15 VDC	200 mA	85 %
TMR 3-2415WISM		24 VDC	125 mA	85 %
TMR 3-2422WISM		±12 VDC	±125 mA	84 %
TMR 3-2423WISM		±15 VDC	±100 mA	84 %
TMR 3-4811WISM	18 – 75 VDC (48 VDC nominal)	5.0 VDC	600 mA	80 %
TMR 3-4812WISM		12 VDC	250 mA	84 %
TMR 3-4813WISM		15 VDC	200 mA	84 %
TMR 3-4815WISM		24 VDC	125 mA	85 %
TMR 3-4822WISM		±12 VDC	±125 mA	83 %
TMR 3-4823WISM		±15 VDC	±100 mA	82 %

Input Specifications

Input current no load	9 Vin models: 40 mA typ 24 Vin models: 20 mA typ. 48 Vin models: 13 mA typ.
Surge voltage (1 s max.)	9 Vin models: 15 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.
Start-up voltage	9 Vin models: 4.5 VDC (or lower) 24 Vin models: 9 VDC (or lower) 48 Vin models: 18 VDC (or lower)
Electromagnetic compatibility (EMC), Emissions	EN 55032 class A
Electromagnetic compatibility (EMC), Immunity	EN 55024
– Conducted RI suppression on input	
– Electrostatic discharge (ESD)	IEN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A
– Radiated RF field immunity	EN 61000-4-3, 10 V/m, perf. criteria A
– Electrical fast transient / burst immunity	EN 61000-4-4, ± 2 kV, perf. criteria A with external capacitor: 220 μ F / 100V
– Surge immunity	EN 61000-4-5, ± 1 kV, perf. criteria A with external capacitor: 220 μ F / 100V
– Immunity to conducted RF disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
– Magnetic field immunity	EN 61000-4-8, 3 A/m, perf. criteria A
Input filter	internal PI-Type
Short Circuit Input Power	1500 mW max.

Output Specifications

Voltage set accuracy	± 1 % max.
Voltage balance (dual output models)	2 % max.
Regulation	0.5 % max. 1 % max. 5 % max. (asymmetrical load 25 % / 100 %)
– Input variation	
– Load variation 0 – 100 %	
– Cross regulation - dual output:	
Temperature coefficient	± 0.02 %/K max.
Minimum load	not required
Ripple and noise (20 MHz Bandwidth)	50 mVp-p max.
Start up time (constant resistive load)	30 ms max.
Transient response (25% load step change)	250 μ s typ. 5 % max.
– Recovery time	
– Deviation	
Current limitation	160 % of Iout nom. typ. (foldback)
Short circuit protection	continuous, automatic recovery
Capacitive load	5.0 VDC models: 1680 μ F max. 12 VDC models: 820 μ F max. 15 VDC models: 680 μ F max. 24 VDC models: 390 μ F max.
– Single output	
– Dual output	± 12 VDC models: 470 μ F max. (each output) $+15$ VDC models: 330 μ F max. (each output)

General Specifications

Temperature ranges	– Operating (natural convection: 20 LFM, 0.1 m/s) – Case temperature – Storage temperature	–40°C to +80°C +95°C max. –55°C to +125°C
Derating		3.3 %/K above 65°C
Humidity (non condensing)		95 % rel H max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


General Specifications

Isolation voltage	– I/O isolation voltage (60 s) – I/O isolation voltage (1 s)	1'500 VDC 1'800 VDC
Isolation capacitance (@ 100kHz / 1V)		500 pF typ.
Isolation resistance (@ 500 VDC)		>1 GOhm
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		5'000'000 h min.
Switching frequency		100 kHz min. (PFM)
Safety standards		IEC/EN 60950-1 UL 60950-1
Remote On/Off	– On: – Off: – Off idle current:	open circuit or high impedance 2 – 4 mA current applied via 1kOhm resistor 2.5 mA typ.
Environmental compliance	– Reach – RoHS	RoHS directive 2011/65/EU
Moisture sensitivity level (MSL)		IPC J-STD-033C Level 2
Washing process		not recommended, product non-hermetical

Physical Specifications

Casing material		non-conducting black plastic (UL 94V-0 rated)
Pin material		tinned copper
Package weight		3.5 g (0.12 oz)
Lead-free reflow solder process		IPC J-STD-020D

Outline Dimensions

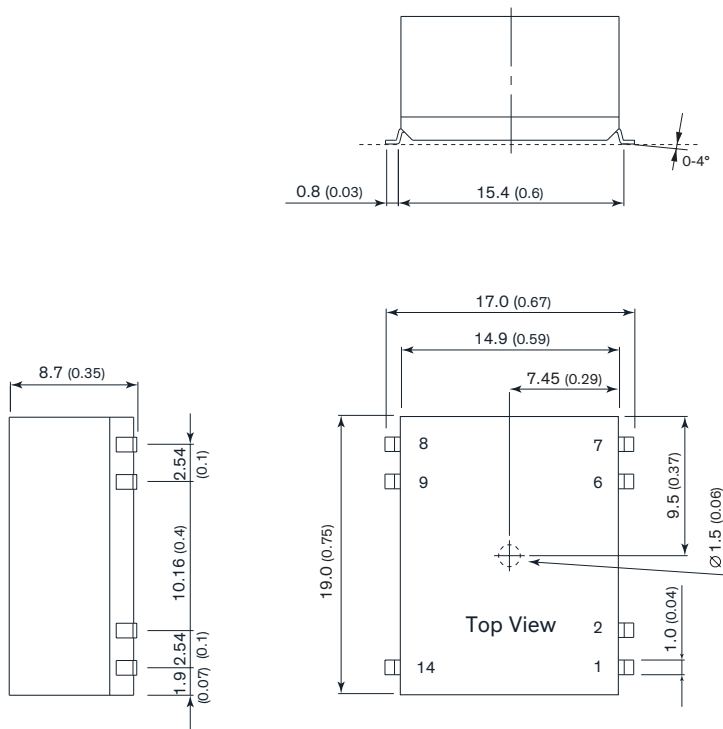

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	On/Off	On/Off
6	no con.	Com.
7	no con.	-Vout
8	+Vout	+Vout
9	-Vout	Com.
14	+Vin (Vcc)	+Vin (Vcc)

Dimensions in [mm], () = Inch
Tolerances: x.x ±0.5 (±0.02)
 x.xx ±0.25 (±0.01)
Pin dimension tolerance ±0.05 (±0.002)