


- Conduction cooled design approach
- Fanless operation with up to 100% output power
- Operating temperature range -30°C to +80°C
- I/O reinforced isolation 4250 VAC
- Over voltage category (OVC III)
- High efficiency up to 92%
- Operating up to 5000 m altitude
- Internal EN 55032 conducted class B filter
- Protection class I prepared
- 3-year product warranty

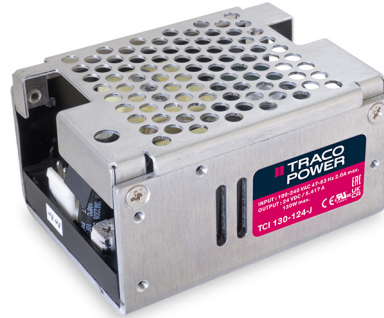

UL 62368-1 IEC 62368-1

The TCI 130 is a 130 Watt conduction cooled AC/DC encased power supply series with a 4250 VAC reinforced isolation system. Traco Power's new TCI line focuses on maximizing the proficiency of conduction cooled systems as it offers superior temperature behavior when mounted on a metal chassis or baseplate. This way the TCI 130 can deliver up to 100% of the maximum output power without the need for a fan. Excellent efficiency of up to 91% allows the TCI series to operate from -30 to +50°C without derating, while going up to +80°C with either load derating or forced cooling. They also meet OVC III requirements and can operate at up to 5000 m altitude. Active power factor correction, EMC characteristics dedicated for applications in industrial/automation and test & measurement fields and high reliability make the new TCI line an ideal solution for any demanding industrial application.

Models

Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max. (Forced air / Conduction cooling)	Output Current max. (Natural convection)	Efficiency typ.
TCI 130-112-J	130 W	12 VDC (10.8 - 13.2 VDC)	10'833 mA	9'917 mA	90 %
TCI 130-124-J		24 VDC (21.6 - 26.4 VDC)	5'417 mA	5'000 mA	90 %
TCI 130-148-J		48 VDC (43.2 - 52.8 VDC)	2'708 mA	2'604 mA	91 %

Options

TCI 130-DC	- Optional Cable: www.tracopower.com/overview/tci130-dc
TCI-AC1	- Optional Cable: www.tracopower.com/overview/tci-ac1
on demand (backorder with MOQ non stocking item)	- Optional models with U-Bracket

Input Specifications

Input Voltage	Operational Range: 90 - 264 VAC (Full Range) Rated Range: 100 - 240 VAC (Full Range)
Input Frequency	Operational Range: 47 - 63 Hz Certified: 50/60 Hz
Power Consumption	- No load & $V_{in} = 230$ VAC - No load & $V_{in} = 115$ VAC 300 mW max. (Ready to meet ErP directive) 300 mW max.
Input Current	- Full load & $V_{in} = 230$ VAC - Full load & $V_{in} = 115$ VAC 1'000 mA max. 2'000 mA max.
Input Inrush Current	- At 230 VAC - At 115 VAC 85 A max. 50 A max.
Power Factor	- At 230 VAC - At 115 VAC 0.9 min. (Active Power Factor Correction) 0.9 min. (Active Power Factor Correction)
Input Protection	T 4 A / 250 VAC (Internal Fuse in L & N)
Recommended Input Fuse	(The need of an external fuse has to be assessed in the final application.)

Output Specifications

Output Voltage Adjustment	$\pm 10\%$ (By trim potentiometer) Output power must not exceed rated power!
Voltage Set Accuracy	$\pm 2\%$ max.
Regulation	- Input Variation ($V_{min} - V_{max}$) - Load Variation (10 - 100%) 1% max. 1% max.
Ripple and Noise (20 MHz Bandwidth)	12 VDC model: 160 mVp-p max. (w/ 0.1 μ F ceramic 47 μ F KY) 24 VDC model: 240 mVp-p max. (w/ 0.1 μ F ceramic 47 μ F KY) 48 VDC model: 340 mVp-p max. (w/ 0.1 μ F ceramic 47 μ F KY)
Capacitive Load	12 VDC model: 4'000 μ F max. 24 VDC model: 1'000 μ F max. 48 VDC model: 330 μ F max.
Minimum Load	Not required
Temperature Coefficient	± 0.05 %/K max.
Hold-up Time	- At 230 VAC - At 115 VAC 27 ms min. 8 ms min.
Start-up Time	- At 230 VAC - At 115 VAC 1'350 ms max. 1'000 ms max.
Short Circuit Protection	Continuous, Automatic recovery (Level 1, nom.) Latch (Level 2, instantaneous high current)
Output Current Limitation	117 - 196% of I_{out} max.
Overvoltage Protection	108 - 130% of V_{out} nom.
Transient Response	- Response Deviation - Response Time 3% typ. / 5% max. (25% to 100% Load Step) 500 μ s typ. / 750 μ s max. (25% to 100% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment - Certification Documents EN 62368-1 IEC 62368-1 UL 62368-1 www.tracopower.com/overview/tci130
Protection Class	Class I (Prepared): Connection to PE See application note: www.tracopower.com/info/protection-class.pdf
Pollution Degree	PD 2
Over Voltage Category	OVC II OVC III

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 55032 class A (internal filter)
		EN 55032 class B (internal filter)
	- Radiated Emissions	EN 55032 class A (internal filter)
	- Harmonic Current Emissions	EN 61000-3-2, class A
EMS (Immunity)		EN 55035 (Multimedia)
	- Electrostatic Discharge	Air: EN 61000-4-2, ± 8 kV, perf. criteria A
		Contact: EN 61000-4-2, ± 4 kV, perf. criteria A
		EN 61000-4-3, 3 V/m, perf. criteria A
		EN 61000-4-4, ± 1 kV, perf. criteria A
	- RF Electromagnetic Field	L to L: EN 61000-4-5, ± 1 kV, perf. criteria A
		L to PE: EN 61000-4-5, ± 2 kV, perf. criteria A
		EN 61000-4-6, 3 Vrms, perf. criteria A
		Continuous: EN 61000-4-8, 1 A/m, perf. criteria A
	- EFT (Burst) / Surge	230 VAC / 50 Hz: EN 61000-4-11
		30%, 25 periods, perf. criteria A
		>95%, 250 periods, perf. criteria B
		115 VAC / 60 Hz: EN 61000-4-11
	- Conducted RF Disturbances	30%, 25 periods, perf. criteria A
		>95%, 250 periods, perf. criteria B
	- PF Magnetic Field	
	- Voltage Dips & Interruptions	
EMC / Environmental		- Certification Documents
		www.tracopower.com/overview/tci130

General Specifications

Relative Humidity		90% max. (non condensing)
Temperature Ranges	- Operating Temperature	-30°C to +80°C
	- Storage Temperature	-30°C to +80°C
Power Derating	- High Temperature	Depending on model
	- Low Input Voltage	2 %/V below 100 VAC
		See application note: www.tracopower.com/overview/tci130
Over Temperature Protection Switch Off	- Protection Mode	115°C min. / 120°C typ. / 125°C max.
	- Measurement Point	(Automatic recovery at 90°C typ.) Internal IC temperature
Cooling System		Forced air (with external fan, 8 CFM)
		Natural convection (20 LFM)
		Conduction Cooling (with a 300 x 300 x 3.0 mm aluminum plate)
Altitude During Operation		4'000 m max. (for OVC III) 5'000 m max. (for OVC II)
Regulator Topology		QR Flyback Converter
Switching Frequency		45 - 76 kHz (PWM, PFM) (Above 25% load PWM is used, below 25% load PFM is used) 60 kHz typ. (PWM, PFM) (Above 25% load PWM is used, below 25% load PFM is used)
Insulation System		Reinforced Insulation
Working Voltage (rated)		391 VAC
Isolation Test Voltage	- Input to Output, 60 s	4'250 VAC (6'000 VDC)
	- Input to Case or PE, 60 s	2'830 VAC (4'000 VDC)
	- Output to Case or PE, 60 s	1'500 VAC (2'121 VDC)
Isolation Resistance		100 MΩ min.
Leakage Current (at 264 VAC / 63 Hz)		750 μA max.
Distance Through Isolation		7.1 mm
Reliability		- Calculated MTBF 400'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Not allowed

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.


Environment	- Vibration - Mechanical Shock	IEC 60068-2-6 2 g, 3 axis, 60 min, 10-500 Hz, 10 min/cycle IEC 60068-2-27 50 g, 3 axis, half sine, 11 ms
Housing Material		Aluminum
Potting Material		Silicone (UL 94 V-0 rated) (the converter is partly potted on the bottom)
Housing Type		Metal Case
Mounting Type		Chassis Mount
Connection Type		Pin Connector
Weight		292 g (for standard version) 280 g (for optional U-Bracket models)
Environmental Compliance	- REACH Declaration - RoHS Declaration - SCIP Reference Number	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7(a), 7(c)-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) 4cf2bfa3-142d-4255-a827-ca241ce874db

Additional Information

Supporting Documents	www.tracopower.com/overview/tci130
Frequently Asked Questions	www.tracopower.com/glossary-faq
Glossary	www.tracopower.com/info/glossary.pdf

Outline Dimensions

Standard version

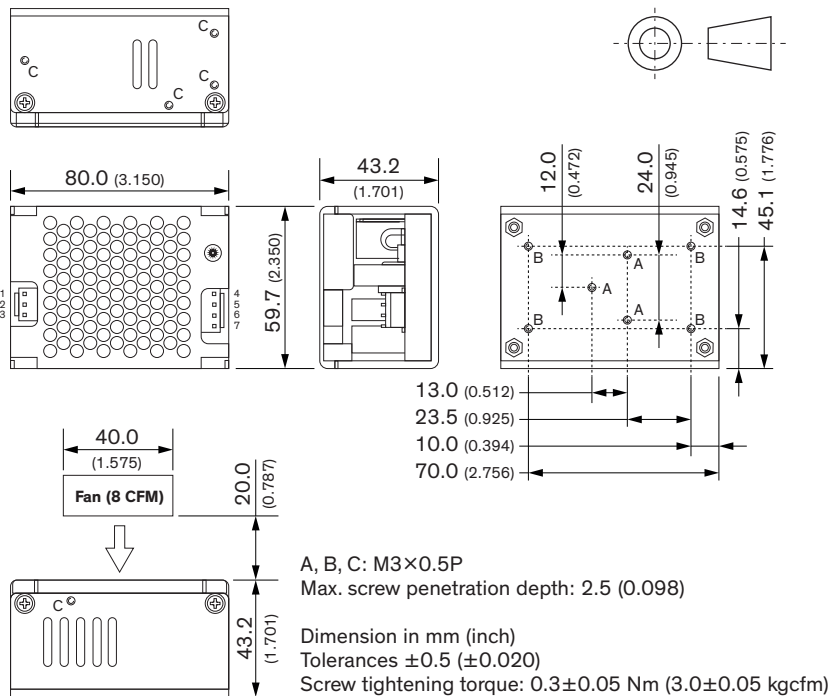

Pin connectors

Input		Output	
Pin	Function	Pin	Function
1	AC (N)	4-5	+Vout
2	No Pin	6-7	-Vout
3	AC (L)		

Case

(no dedicated connector)


Pos	Function
A	For mounting on chassis only
B	For mounting on PCB or chassis, and connecting PE
C	For connecting PE only

Input: JST series
mates with JST crimp terminal: SVH-41T-P1.1 or Equivalent
and terminal housing: VHR-3N or Equivalent

Output: JST series
mates with JST crimp terminal: SVH-41T-P1.1 or Equivalent
and terminal housing: VHR-4N or Equivalent

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Optional version with U-Bracket

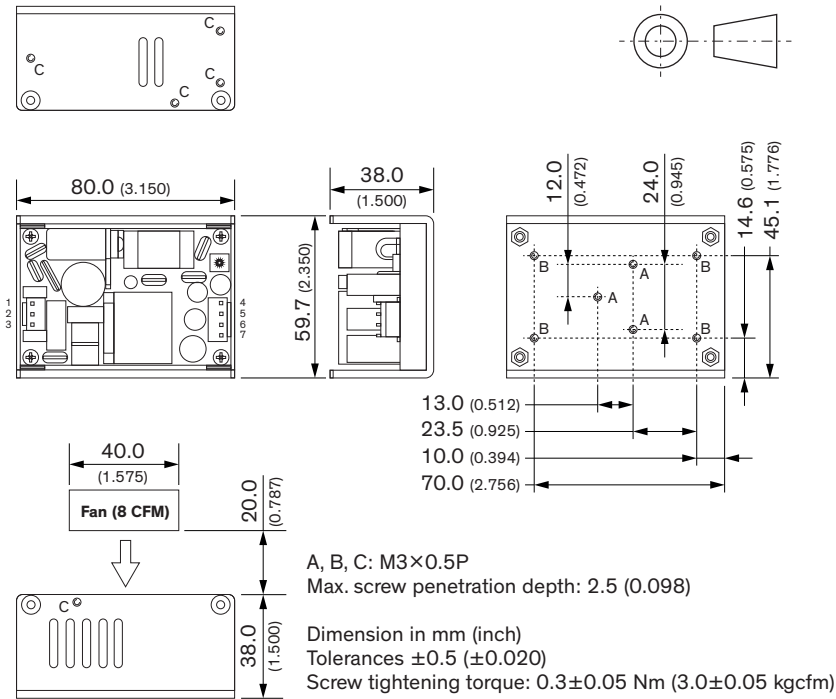

Pin connectors

Input		Output	
Pin	Function	Pin	Function
1	AC (N)	4-5	+Vout
2	No Pin	6-7	-Vout
3	AC (L)		

Case

(no dedicated connector)

Pos	Function
A	For mounting on chassis only
B	For mounting on PCB or chassis, and connecting PE
C	For connecting PE only

Input: JST series

mates with JST crimp terminal: SVH-41T-P1.1 or Equivalent
and terminal housing: VHR-3N or Equivalent

Output: JST series

mates with JST crimp terminal: SVH-41T-P1.1 or Equivalent
and terminal housing: VHR-4N or Equivalent