


- Compact open frame power supply with pin connectors
- Universal input range 90 to 264 VAC
- Convection cooled (no-fan)
- Operating temperature range: -20°C to +70°C
- Internal EN55032 class B filter
- Short circuit, overvoltage and overload protection
- IEC/EN/UL 62368-1 safety approvals
- Compliance to EN 61000-3-2
- 3-year product warranty

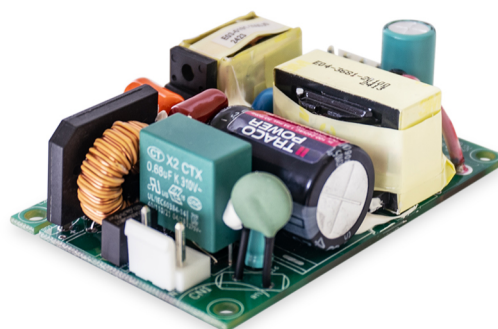

UL 62368-1 IEC 62368-1

The TXO 120 is a compact 120 Watt AC/DC open frame module with reinforced I/O isolation designed for a wide range of cost sensitive applications. Excellent temperature behaviour allows the TXO 120 to deliver 100 Watt up to +50°C with convection cooling and 120 Watt up to +50°C with forced air cooling, while going up to +70°C with derating. The TXO 120 series features short circuit protection, over current limitation and overvoltage protection and complies with European EMC standards and the Low Voltage Directive (LVD).

Models					
Order Code	Output Power max.	Output Voltage nom.	Output Current max. (Forced air cooling)	Output Current max. (Natural convection)	Efficiency typ.
TXO 120-112-J	120 W	12 VDC	10'000 mA	8'330 mA	92 %
TXO 120-115-J		15 VDC	8'000 mA	6'660 mA	92 %
TXO 120-124-J		24 VDC	5'000 mA	4'160 mA	92 %
TXO 120-148-J		48 VDC	2'500 mA	2'080 mA	92 %

Options	
TCI 130-DC	- Optional Cable: www.tracopower.com/overview/tci130-dc
TCI-AC1	- Optional Cable: www.tracopower.com/overview/tci-ac1
on demand (backorder with MOQ non stocking item)	- Optional model with 36 VDC and 3'330 mA - Optional model with 56 VDC and 2'140 mA

Note - Total output power must not exceed 100 W for convection cooling applications

Input Specifications

Input Voltage	Operational Range: 90 - 264 VAC (Full Range) Rated Range: 100 - 240 VAC (Full Range)
Input Frequency	Operational Range: 47 - 63 Hz Certified: 50/60 Hz
Power Consumption	- No load & $V_{in} = 230$ VAC 150 mW max. - No load & $V_{in} = 115$ VAC 150 mW max.
Input Current	- Full load & $V_{in} = 230$ VAC 650 mA max. - Full load & $V_{in} = 115$ VAC 1'200 mA max.
Input Inrush Current	- At 230 VAC 100 A max. - At 115 VAC 60 A max.
Power Factor	- At 230 VAC 0.9 min. (Active Power Factor Correction) - At 115 VAC 0.95 min. (Active Power Factor Correction)
Input Protection	T 3.15 A / 250 VAC (Internal Fuse in L)
Recommended Input Fuse	3'150 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)

Output Specifications

Voltage Set Accuracy	$\pm 2\%$ max.
Regulation	- Input Variation ($V_{min} - V_{max}$) 0.5% max. - Load Variation (10 - 100%) 3% max.
Ripple and Noise (20 MHz Bandwidth)	12 VDC model: 150 mVp-p typ. (w/ 10 μ F Alu 0.1 μ F MLCC) 15 VDC model: 150 mVp-p typ. (w/ 10 μ F Alu 0.1 μ F MLCC) 24 VDC model: 240 mVp-p typ. (w/ 10 μ F Alu 0.1 μ F MLCC) 36 VDC model: 360 mVp-p typ. (w/ 10 μ F Alu 0.1 μ F MLCC) 48 VDC model: 480 mVp-p typ. (w/ 10 μ F Alu 0.1 μ F MLCC) 56 VDC model: 560 mVp-p typ. (w/ 10 μ F Alu 0.1 μ F MLCC)
Capacitive Load	12 VDC model: 10'000 μ F max. 15 VDC model: 8'000 μ F max. 24 VDC model: 5'000 μ F max. 36 VDC model: 3'300 μ F max. 48 VDC model: 2'500 μ F max. 56 VDC model: 2'200 μ F max.
Minimum Load	Not required
Temperature Coefficient	± 0.05 %/K max.
Hold-up Time	- At 230 VAC 16 ms min. - At 115 VAC 16 ms min.
Start-up Time	- At 230 VAC 2 s max. - At 115 VAC 2 s max.
Short Circuit Protection	Continuous, Automatic recovery
Output Current Limitation	110 - 170% of I_{out} max.
Overvoltage Protection	110 - 160% of V_{out} nom. (Latch mode)
Transient Response	- Response Deviation 3% typ. / 5% max. (50% to 75% Load Step) - Response Time 2.5 ms typ. / 4 ms max. (50% to 75% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment EN 62368-1 IEC 62368-1 UL 62368-1 - Certification Documents www.tracopower.com/overview/txo120
-----------	---

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Protection Class	Class I & II (Prepared): Reinforced Insulation (In Class I applications, the power supply must be mounted onto a metal base plate. A minimum distance of 6 mm between power supply and base plate must be maintained.)
Pollution Degree	PD 2
Over Voltage Category	OVC II

EMC Specifications

EMI (Emissions)	- Conducted Emissions - Radiated Emissions - Harmonic Current Emissions - Voltage Fluctuations & Flicker	EN 55032 class B (internal filter) FCC 47 Part 15 class B (internal filter) EN 55032 class A (internal filter) FCC 47 Part 15 class A (internal filter) EN 61000-3-2, class A EN 61000-3-3
EMS (Immunity)	- Electrostatic Discharge - RF Electromagnetic Field - EFT (Burst) / Surge - Conducted RF Disturbances - PF Magnetic Field - Voltage Dips & Interruptions	Air: EN 55035 (Multimedia) Contact: EN 61000-4-2, ± 8 kV, perf. criteria A EN 61000-4-3, ± 4 kV, perf. criteria A EN 61000-4-3, 3 V/m, perf. criteria A EN 61000-4-4, ± 1 kV, perf. criteria A L to L: EN 61000-4-5, ± 1 kV, perf. criteria A EN 61000-4-6, 3 Vrms, perf. criteria A Continuous: EN 61000-4-8, 1 A/m, perf. criteria A 230 VAC / 50 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 250 periods, perf. criteria B
EMC / Environmental	- Certification Documents	www.tracopower.com/overview/txo120

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Approved Ambient Temp. - Storage Temperature	-20°C to +70°C +70°C max. (for 50% load) +50°C max. (for 100% load) (for compliance to 62368-1) -40°C to +85°C
Power Derating	- High Temperature	2.5 %/K above 50°C
Cooling System	- Option 1 - Option 2	Forced air cooling (with external fan, 10 CFM) Natural convection (20 LFM)
Altitude During Operation		2'000 m max.
Regulator Topology		LLC Converter
Switching Frequency		100 kHz typ. (PFM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		464 VAC
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC (4'242 VDC)
Creepage	- Input to Output	3 mm min.
Clearance	- Input to Output	6 mm min.
Isolation Resistance	- Input to Output, 500 VDC	100 MΩ min.
Leakage Current (at 264 VAC / 60 Hz)	- Touch Current	300 μA max.
Reliability	- Calculated MTBF	100'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Not allowed
Environment	- Vibration - Mechanical Shock	2.4 g, 3 axis, random waveform, 30 min 20 g, 3 axis, 6 shocks
Housing Type		Open Frame

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.


Mounting Type	Chassis Mount
Connection Type	Pin Connector
Weight	111 g
Environmental Compliance	- REACH Declaration www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) 76709c82-3075-4be0-9ccb-c2736d06f3be
	- RoHS Declaration
	- SCIP Reference Number

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/txo120

Outline Dimensions

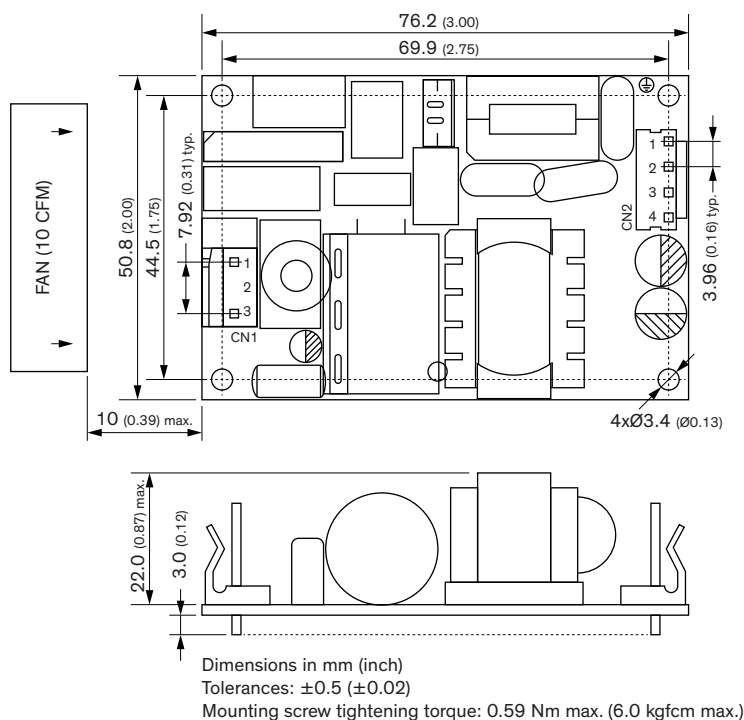

Pin connectors

Input (CN1)		Output (CN2)	
Pin	Function	Pin	Function
1	AC (L)	1	+Vout
3	AC (N)	2	
		3	-Vout
		4	

Input (CN1): JST series, B3P-VH(LF)(SN), 3.96mm mates with JST crimp terminal: SVH-21T-P1.1 or equivalent and terminal housing: VHR-3N or equivalent

Output (CN2): JST series, B4P-VH(LF)(SN), 3.96mm mates with JST crimp terminal: SVH-21T-P1.1 or equivalent and terminal housing: VHR-4N or equivalent